

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



JUMO dTRANS T07

Two-channel temperature transmitter with HART/Ex/SIL

for installation into terminal head form B and for installation on DIN rail

Brief description

The JUMO dTRANS T07 device series is a two-channel temperature transmitter with HART¹ communication. The devices are available in 2 versions: for installation in a B-head or for DIN-rail mounting. The variants with Ex and SIL approval (IEC 61508) for SIL 2/3 (hardware/software) enable secure use in demanding process applications.

The configurable transmitters transmit converted signals from RTD temperature probes and thermocouples (TC) as well as from resistor and voltage sensors to the galvanically isolated 4 to 20 mA current output. Internal sensor monitoring functions and device error detection enable a high degree of measuring point availability.

The optional plug-on display BD7 can be used to display the current measured value on the B-head variant.

The JUMO dTRANS T07 device series is tailor-made for all industries like chemicals, oil, gas, and power plants & energy, as well all others in which safe and reliable temperature measurements are required.




Type 707080 (dTRANS T07 B)



Type 707082 (dTRANS T07 T)

¹ HART® is a registered trademark of the FieldComm Group™

Block diagram

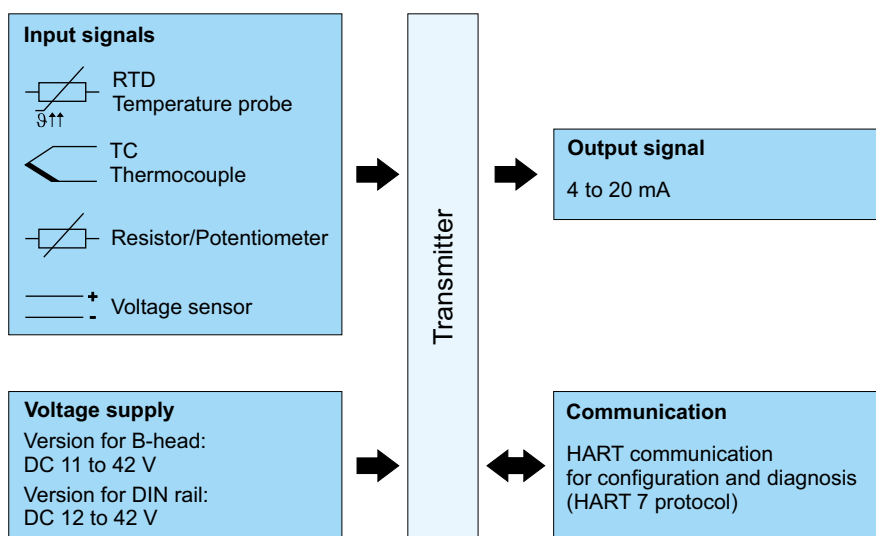

Special features

- Two universal measurement inputs (RTD, TC, Ω, mV)
- High degree of accuracy (0.1 K with Pt100 sensor)
- Output 4 to 20 mA (single channel, loop powered)
- Two enclosure versions (B-head or DIN rail)
- HART 7 protocol with extension for "secure HART"
- SIL 2/3 hardware/software according to IEC 61508
- Reliable measurement operation through sensor monitoring and device hardware error detection
- Optional plug-on display BD7 for B-head device version

Approvals and approval marks (see technical data)



JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Type overview

| Type | Designation | Description |
|--------|---------------------|---|
| 707080 | dTRANS T07 B | For installation in terminal head, form B |
| 707081 | dTRANS T07 B SIL | For installation in terminal head, form B, with SIL approval |
| 707082 | dTRANS T07 T | For mounting on DIN rail |
| 707083 | dTRANS T07 T SIL | For mounting on DIN rail, with SIL approval |
| 707085 | dTRANS T07 B Ex | For installation in terminal head, form B, with Ex approval |
| 707086 | dTRANS T07 B EX SIL | For installation in terminal head, form B, with Ex and SIL approval |
| 707087 | dTRANS T07 T Ex | For mounting on DIN rail, with Ex approval |
| 707088 | dTRANS T07 T Ex SIL | For mounting on DIN rail, with Ex and SIL approval |

Operating mode

The temperature transmitters in the dTRANS T07 series are two-wire transmitters with two measurement inputs and one analog output.

The devices transmit both converted signals from RTD temperature probes and thermocouples, but also resistance and voltage signals via the HART communication and as a 4 to 20 mA current signal.

They can be installed as intrinsically safe equipment in potentially explosive areas and serve primarily for instrumentation in the form B terminal head in accordance with DIN EN 50446 or as a DIN rail device for installation in the control cabinet on a TH 35 DIN rail in accordance with DIN EN 60715.

Application examples

| Example 1: Two sensors with measurement input (RTD or TC) in remote installation on a DIN rail device with the following advantages: drift warning, sensor backup function and temperature-dependent sensor switching | Example 2: Integrated transmitter in the terminal head – 1 x RTD/TC or 2 x RTD/TC as redundancy |
|---|---|
| | |

JUMO GmbH & Co. KG

Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.

6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com



Functions

Standard diagnostic functions

- Wire breakage, short-circuit of the sensor lines
- Wiring faults
- Internal device errors
- Measuring range exceeded (too high or too low)
- Ambient temperature limits exceeded (too high or too low)

Corrosion detection in accordance with NAMUR NE89

Corrosion of sensor connection wires can falsify the measured values. The transmitters offer the option of detecting corrosion on thermocouples and RTD temperature probes with four-wire connection before the measured values are affected. The transmitters prevent incorrect measured values from being read out and can output a warning via the HART protocol if conductor resistances exceed plausible limits.

Undervoltage detection

The undervoltage detection prevents the continuous output of an incorrect analog output value by the devices (due to damaged or incorrect voltage supply or due to a damaged signal cable). If the voltage drops below the minimum required voltage supply then the analog output value drops for approx. 5 s to < 3.6 mA. Afterwards the devices attempt to output the normal analog output value again. If the voltage supply is still too low, this process is repeated cyclically.

Two-channel functions

These functions increase the reliability and availability of the measured values:

- The sensor backup switches to the second sensor if the primary sensor fails.
- Drift warning or alarm if the deviation between sensor 1 and sensor 2 is less than or greater than a defined limit value.
- Temperature-dependent switching between sensors that are used in different measuring ranges.
- Average value measurement or differential measurement from two sensors.
- Average value measurement with sensor redundancy

Not all modes are available for SIL operation ⇒ SIL safety manual for dTRANS T07 series (SIL designs).

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Technical data

Analog input

General information

| | |
|------------------------|---|
| Measurand | Temperature (temperature-linear transmission behavior), resistance and voltage. |
| Measuring range | It is possible to connect two mutually independent sensors. ^a The measurement inputs are not galvanically isolated from each other. |

^a With a 2-channel measurement, the same measurement unit must be configured on both channels (e.g. both °C, °F, or K). Mutually independent 2-channel measurement of resistance/potentiometer (ohm) and voltage sensor (mV) is not possible. In this case, either both channels must be configured to "ohm" or both channels must be configured to "mV".

RTD temperature probe

| Standard | Designation ^a | α | Measuring range limits | Minimum measuring span |
|-----------------------------------|--|--------------------------|--|------------------------|
| IEC 60751:2008 | Pt100 (1) | 0.003851 K ⁻¹ | -200 to +850 °C | 10 K |
| | Pt200 (2) | | -200 to +850 °C | |
| | Pt500 (3) | | -200 to +500 °C | |
| | Pt1000 (4) | | -200 to +250 °C | |
| JIS C1604:1984 | Pt100 (5) | 0.003916 K ⁻¹ | -200 to +510 °C | 10 K |
| DIN 43760 IPTS-68 | Ni100 (6) | 0.006180 K ⁻¹ | -60 to +250 °C | 10 K |
| | Ni120 (7) | | -60 to +250 °C | |
| GOST 6651-94 | Pt50 (8) | 0.003910 K ⁻¹ | -85 to +1100 °C | 10 K |
| | Pt100 (9) | | -200 to +850 °C | |
| OIML R84: 2003, GOST 6651-2009 | Cu50 (10) | 0.004280 K ⁻¹ | -180 to +200 °C | 10 K |
| | Cu100 (11) | | -180 to +200 °C | |
| | Ni100 (12) | 0.006170 K ⁻¹ | -60 to +180 °C | |
| | Ni120 (13) | | -60 to +180 °C | |
| OIML R84: 2003, GOST 6651-94 | Cu50 (14) | 0.004260 K ⁻¹ | -50 to +200 °C | 10 K |
| - | Pt100 (Callendar–Van Dusen) nickel polynomial copper polynomial | - | The measuring range limits are defined by entering the limit values, which depend on the coefficients A to C and R0. | 10 K |
| | <ul style="list-style-type: none"> • Connection type: two-wire, three-wire or four-wire connection, sensor current: ≤ 0.3 mA • On a two-wire circuit compensation for the wire resistance is possible (0 to 30 Ω) • On three-wire and four-wire connections: sensor wire resistance of up to 50 Ω max. per wire | | | |

^a The digits after the designations are used to clarify distinctions, e.g. for distinguishing the same sensors on the basis of different standards. They are also used for configuration and safe parameterization of the transmitter.

Resistance/potentiometer (Ω)

| Standard | Designation | α | Measuring range limits | Minimum measuring span |
|----------|----------------|----------|------------------------|------------------------|
| - | Resistance (Ω) | - | 10 to 400 Ω | 10 Ω |
| | | | 10 to 2000 Ω | 10 Ω |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Thermocouples (TC)

| Standard | Designation ^a | Measuring range limits | | Minimum measuring span |
|-----------------------------------|--|----------------------------|-------------------------------|------------------------|
| | | Possible temperature range | Recommended temperature range | |
| IEC 60584, part 1 | Type A (W5Re-W20Re) (30) | 0 to +2500 °C | 0 to +2500 °C | 50 K |
| | Type B (PtRh30-PtRh6) (31) | +40 to +1820 °C | +500 to +1820 °C | 50 K |
| | Type E (NiCr-CuNi) (34) | -270 to +1000 °C | -150 to +1000 °C | 50 K |
| | Type J (Fe-CuNi) (35) | -210 to +1200 °C | -150 to +1200 °C | 50 K |
| | Type K (NiCr-Ni) (36) | -270 to +1372 °C | -150 to +1200 °C | 50 K |
| | Type N (NiCrSi-NiSi) (37) | -270 to +1300 °C | -150 to +1300 °C | 50 K |
| | Type R (PtRh13-Pt) (38) | -50 to +1768 °C | +50 to +1768 °C | 50 K |
| | Type S (PtRh10-Pt) (39) | -50 to +1768 °C | +50 to +1768 °C | 50 K |
| | Type T (Cu-CuNi) (40) | -260 to +400 °C | -150 to +400 °C | 50 K |
| IEC 60584, part 1 ASTM E988-96 | Type C (W5Re-W26Re) (32) | 0 to +2315 °C | 0 to +2000 °C | 50 K |
| ASTM E988-96 | Type D (W3Re-W25Re) (33) | 0 to +2315 °C | 0 to +2000 °C | 50 K |
| DIN 43710 | Type L (Fe-CuNi) (41) | -200 to +900 °C | -150 to +900 °C | 50 K |
| | Type U (Cu-CuNi) (42) | -200 to +600 °C | -150 to +600 °C | 50 K |
| GOST R8.8585-2001 | Type L (NiCr-CuNi/Chromel-Copel) (43) | -200 to +800 °C | -200 to +800 °C | 50 K |
| - | <ul style="list-style-type: none"> Internal cold junction (Pt100) External cold junction: adjustable value from -40 to +85 °C Maximum sensor wire resistance 10 kΩ (if the sensor wire resistance is greater than 10 kΩ then an error message will be output in accordance with NAMUR NE89) | | | |

^a The digits after the designations are used to clarify distinctions, e.g. for distinguishing the same sensors on the basis of different standards. They are also used for configuration and safe parameterization of the transmitter.

Voltage sensor (mV)

| Standard | Designation | α | Measuring range limits | Minimum measuring span |
|----------|-----------------------|----------|------------------------|------------------------|
| - | Millivolt sensor (mV) | - | -20 to 100 mV | 5 mV |

Connection combinations

If both sensor inputs are assigned then the following connection combinations are possible:

| | | Sensor input 1 | | | |
|----------------|---|---|---|--|-------------------------------------|
| | | RTD or resistance/potentiometer, two-wire | RTD or resistance/potentiometer, three-wire | RTD or resistance/potentiometer, four-wire | Thermocouple (TC), voltage sensor |
| Sensor input 2 | RTD or resistance/potentiometer, two-wire | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| | RTD or resistance/potentiometer, three-wire | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| | RTD or resistance/potentiometer, four-wire | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | Thermocouple (TC), voltage sensor | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Output

| | | |
|--|---|---|
| Output signal | 4 to 20 mA, 20 to 4 mA (invertible) | |
| Signal coding | FSK ±0.5 mA via current signal | |
| Data transmission speed | 1200 baud | |
| Galvanic isolation | U = AC 2 kV (input/output) | |
| Failure information in accordance with NAMUR NE43 | Is generated if the measurement information is invalid or missing. A complete list of all errors that have occurred in the measurement device is emitted. | |
| Measuring range underflow | Linear drop from 4.0 to 3.8 mA | |
| Measuring range overflow | Linear rise from 20.0 to 20.5 mA | |
| Failure (sensor breakage, sensor short circuit, ...) | ≤ 3.6 mA ("low") or ≥ 21 mA ("high") can be selected. The alarm setting "high" is adjustable between 21.5 mA and 23 mA and thus offers the flexibility required to meet the requirements of different control systems. In SIL mode only the alarm setting "low" is possible. | |
| Burden | <p>Head transmitter: $R_{b \max} = (U_{b \max} - 11 \text{ V}) / 0.023 \text{ A}$ (current output)</p> | <p>DIN rail device: $R_{b \max} = (U_{b \max} - 12 \text{ V}) / 0.023 \text{ A}$ (current output)</p> |
| Linearization/transmission behavior | Temperature-linear, resistance-linear, voltage-linear | |
| Mains frequency filter | 50/60 Hz | |
| Filter | Digital 1st-order filter: 0 to 120 s | |
| Protocol-specific data | <p>HART version: 7</p> <p>Device address in multidrop mode^a: Software setting addresses 0 to 63</p> <p>Device description files (DD): Information and files freely available on the Internet from: www.jumo.net</p> <p>Burden (communication resistance): At least 250 Ω</p> | |
| Write protection for device parameters | <p>Hardware: On the optional BD7 plug-in display of the head transmitter via DIP switch</p> <p>Software: Via password</p> | |
| Switch-on delay | <ul style="list-style-type: none"> • Approx. 10 s^b until the start of HART communication; $I_a \leq 3.8 \text{ mA}$ during switch-on delay • Approx. 28 s until the first valid measured value signal is present at the current output; $I_a \leq 3.8 \text{ mA}$ during the switch-on delay | |

^a Not possible in SIL mode; refer to the safety manual for the JUMO dTRANS T07 series (SIL versions).

^b Does not apply to SIL mode; refer to the safety manual for the JUMO dTRANS T07 series (SIL versions).

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Features

Physical input measuring range of the sensors

| | |
|---|---------------|
| Cu50, Cu100, RTD polynomial, Pt50, Pt100, Ni100, Ni120 | 10 to 400 Ω |
| Pt200, Pt500, Pt1000 | 10 to 2000 Ω |
| Thermocouple types: A, B, C, D, E, J, K, L, N, R, S, T, U | -20 to 100 mV |

Response time

The update of the measured value depends on the sensor type and the circuit type, and is in the following ranges:

| | |
|-----------------------|--|
| RTD temperature probe | 0.9 to 1.3 s (depending on the circuit type two/three/four-wire) |
| Thermocouples (TC) | 0.8 s |
| Reference temperature | 0.9 s |

When recording step responses, it must be taken into account that, where applicable, the times for the measurement of the second channel and the internal reference measuring point are added to the stated times.

Reference conditions

| | |
|-------------------------|--|
| Calibration temperature | +25 °C ±3 K |
| Voltage supply | DC 24 V |
| Electrical circuit | Four-wire circuit for resistance calibration |

Measurement deviation

Measurement deviation according to DIN EN 60770 and the reference conditions stated above. The specifications for the measurement deviation correspond to $\pm 2 \sigma$ (Gaussian normal distribution). The specification includes nonlinearities and repeatability.

Typical measurement deviation for RTD temperature probes

| Standard | Designation | Measuring range | Typical measurement deviation (±) | |
|----------------|-------------|-----------------|-----------------------------------|-----------------------------|
| | | | Digital value ^a | Value at the current output |
| IEC 60751:2008 | Pt100 (1) | 0 to +200 °C | 0.08 °C | 0.1 °C |
| IEC 60751:2008 | Pt1000 (4) | | 0.08 °C | 0.1 °C |
| GOST 6651-94 | Pt100 (9) | | 0.07 °C | 0.09 °C |

^a Measured value transferred via HART®.

Typical measurement deviation for thermocouples (TC)

| Standard | Designation | Measuring range | Typical measurement deviation (±) | |
|---|-------------------------|-----------------|-----------------------------------|-----------------------------|
| | | | Digital value ^a | Value at the current output |
| Thermocouples (TC) compliant with the standard | | | | |
| IEC 60584, part 1 | Type K (NiCr-Ni) (36) | 0 to +800 °C | 0.31 °C | 0.39 °C |
| IEC 60584, part 1 | Type S (PtRh10-Pt) (39) | | 0.97 °C | 1.0 °C |
| GOST R8.8585-2001 | Type L (NiCr-CuNi) (43) | | 2.18 °C | 2.2 °C |

^a Measured value transferred via HART®.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Maximum measurement deviation for RTD temperature probes

| Standard | Designation | Measuring range | Measurement deviation (±) | | D/A ^b |
|-----------------------------------|-------------|-----------------|---------------------------|--|-------------------|
| | | | Digital ^a | | |
| | | | Maximum ^c | Related to the measured value ^d | |
| IEC 60751:2008 | Pt100 (1) | -200 to +850 °C | ≤ 0.12 °C | 0.06 °C + 0.006 % × (MV - MRS) | 0.03 % (≅ 4.8 µA) |
| | Pt200 (2) | -200 to +850 °C | ≤ 0.28 °C | 0.12 °C + 0.015 % × (MV - MRS) | |
| | Pt500 (3) | -200 to +500 °C | ≤ 0.15 °C | 0.05 °C + 0.014 % × (MV - MRS) | |
| | Pt1000 (4) | -200 to +250 °C | ≤ 0.09 °C | 0.03 °C + 0.013 % × (MV - MRS) | |
| JIS C1604:1984 | Pt100 (5) | -200 to +510 °C | ≤ 0.09 °C | 0.05 °C + 0.006 % × (MV - MRS) | |
| DIN 43760 IPTS-68 | Ni100 (6) | -60 to +250 °C | ≤ 0.05 °C | 0.05 °C - 0.006 % × (MV - MRS) | |
| | Ni120 (7) | -60 to +250 °C | ≤ 0.05 °C | 0.05 °C - 0.006 % × (MV - MRS) | |
| GOST 6651-94 | Pt50 (8) | -85 to +1100 °C | ≤ 0.21 °C | 0.10 °C + 0.008 % × (MV - MRS) | |
| | Pt100 (9) | -200 to +850 °C | ≤ 0.11 °C | 0.05 °C + 0.006 % × (MV - MRS) | |
| OIML R84: 2003, GOST 6651-2009 | Cu50 (10) | -180 to +200 °C | ≤ 0.12 °C | 0.10 °C + 0.006 % × (MV - MRS) | |
| | Cu100 (11) | -180 to +200 °C | ≤ 0.06 °C | 0.05 °C + 0.003 % × (MV - MRS) | |
| | Ni100 (12) | -60 to +180 °C | ≤ 0.06 °C | 0.06 °C - 0.006 % × (MV - MRS) | |
| | Ni120 (13) | -60 to +180 °C | ≤ 0.05 °C | 0.05 °C - 0.006 % × (MV - MRS) | |
| OIML R84: 2003, GOST 6651-94 | Cu50 (14) | -50 to +200 °C | ≤ 0.11 °C | 0.10 °C + 0.004 % × (MV - MRS) | |

- ^a Measured value transferred via HART®.
- ^b Percentage data related to the configured measuring span of the analog output signal.
- ^c Maximum measurement deviation related to the stated measuring range.
- ^d MV = measured value; MRS = measuring range start of the relevant sensor.

Maximum measurement deviation for resistors/potentiometers

| Standard | Designation | Measuring range | Measurement deviation (±) | | D/A ^b |
|----------|--------------|-----------------|---------------------------|-------------------------------|-------------------|
| | | | Digital ^a | | |
| | | | Maximum ^c | Related to the measured value | |
| - | Resistance Ω | 10 to 400 Ω | 33 mΩ | 21 mΩ + 0.003 % × (MV - MRS) | 0.03 % (≅ 4.8 µA) |
| | | 10 to 2000 Ω | 310 mΩ | 35 mΩ + 0.010 % × (MV - MRS) | |

- ^a Measured value transferred via HART®.
- ^b Percentage data related to the configured measuring span of the analog output signal.
- ^c Maximum measurement deviation related to the stated measuring range.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Maximum measurement deviation for thermocouples (TC)

| Standard | Designation | Measuring range | Measurement deviation (±) | | D/A ^b |
|------------------------------|-------------|------------------|---------------------------|--|-------------------|
| | | | Digital ^a | | |
| | | | Maximum ^c | Related to the measured value ^d | |
| IEC 60584-1 | Type A (30) | 0 to +2500 °C | ≤ 1.33 °C | 0.80 °C + 0.021 % × (MV - MRS) | 0.03 % (± 4.8 µA) |
| | Type B (31) | +500 to +1820 °C | ≤ 1.43 °C | 1.43 °C - 0.060 % × (MV - MRS) | |
| IEC 60584-1/ ASTM E988-96 | Type C (32) | 0 to +2000 °C | ≤ 0.66 °C | 0.55 °C + 0.055 % × (MV - MRS) | |
| ASTM E988-96 | Type D (33) | | ≤ 0.75 °C | 0.85 °C - 0.008 % × (MV - MRS) | |
| IEC 60584-1 | Type E (34) | -150 to +1000 °C | ≤ 0.22 °C | 0.22 °C - 0.006 % × (MV - MRS) | |
| | Type J (35) | -150 to +1200 °C | ≤ 0.27 °C | 0.27 °C - 0.005 % × (MV - MRS) | |
| | Type K (36) | | ≤ 0.35 °C | 0.35 °C - 0.005 % × (MV - MRS) | |
| | Type N (37) | | -150 to +1300 °C | ≤ 0.48 °C | |
| | Type R (38) | +50 to +1768 °C | ≤ 1.12 °C | 1.12 °C - 0.030 % × (MV - MRS) | |
| | Type S (39) | | ≤ 1.15 °C | 1.15 °C - 0.022 % × (MV - MRS) | |
| DIN 43710 | Type T (40) | -150 to +400 °C | ≤ 0.35 °C | 0.35 °C - 0.040 % × (MV - MRS) | |
| | Type L (41) | -150 to +900 °C | ≤ 0.29 °C | 0.29 °C - 0.009 % × (MV - MRS) | |
| GOST R8.8585-2001 | Type U (42) | -150 to +600 °C | ≤ 0.33 °C | 0.33 °C - 0.028 % × (MV - MRS) | |
| | Type L (43) | -200 to +800 °C | ≤ 2.20 °C | 2.20 °C - 0.015 % × (MV - MRS) | |

- ^a Measured value transferred via HART®.
- ^b Percentage data related to the configured measuring span of the analog output signal.
- ^c Maximum measurement deviation related to the stated measuring range.
- ^d MV = measured value; MRS = measuring range start of the relevant sensor.

Maximum measurement deviation for voltage sensor (mV)

| Standard | Designation | Measuring range | Measurement deviation (±) | | D/A ^b |
|----------|-------------|-----------------|---------------------------|--|------------------|
| | | | Digital ^a | | |
| | | | Maximum ^c | Related to the measured value ^d | |
| - | - | -20 to +100 mV | 10,7 µV | 7,7 µV + 0.0025 % × (MV - MRS) | 4.8 µA |

- ^a Measured value transferred via HART®.
- ^b Percentage data related to the configured measuring span of the analog output signal.
- ^c Maximum measurement deviation related to the stated measuring range.
- ^d MV = measured value; MRS = measuring range start of the relevant sensor.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Calculation examples for measurement deviations

Sample calculation 1 with Pt100 (1) and the following parameters:

- Measured value (MV) = +200 °C
- Ambient temperature = +25 °C (same as reference conditions)
- Voltage supply = DC 24 V (same as reference conditions)

| | |
|--|----------|
| Measurement deviation digital = $0.06 \text{ °C} + 0.006 \% \times (200 \text{ °C} - (-200 \text{ °C}))$ | 0.084 °C |
| Measurement deviation D/A = $0.03 \% \times 200 \text{ °C}$ | 0.06 °C |

This results in:

| | |
|---|-----------------|
| Measurement deviation of digital value (HART) | 0.084 °C |
| Measurement deviation of analog value (current output) $\sqrt{(\text{measurement deviation digital}^2 + \text{measurement deviation D/A}^2)}$ | 0.103 °C |

Sample calculation 2 with Pt100 (1) and the following parameters:

- Measured value (MV) = +200 °C
- Ambient temperature = +35 °C (10 K higher than reference conditions)
- Voltage supply = DC 30 V (6 V higher than reference conditions)

| | |
|--|----------|
| Measurement deviation digital = $0.06 \text{ °C} + 0.006 \% \times (200 \text{ °C} - (-200 \text{ °C}))$ | 0.084 °C |
| Measurement deviation D/A = $0.03 \% \times 200 \text{ °C}$ | 0.06 °C |
| Influence of the ambient temperature ^a Digital = $(35 - 25) \times (0.002 \% \times 200 \text{ °C} - (-200 \text{ °C}))$, at least 0.005 °C | 0.08 °C |
| Influence of ambient temperature ^a D/A = $(35 - 25) \times (0.001 \% \times 200 \text{ °C})$ | 0.02 °C |
| Influence of voltage supply ^a digital = $(30 - 24) \times (0.002 \% \times 200 \text{ °C} - (-200 \text{ °C}))$, at least 0.005 °C | 0.048 °C |
| Influence of voltage supply ^a D/A = $(30 - 24) \times (0.001 \% \times 200 \text{ °C})$ | 0.012 °C |

^a See table "Operating influences", Page 11.

This results in:

| | |
|---|-----------------|
| Measurement deviation of digital value (HART) = $\sqrt{(\text{measurement deviation digital}^2 + \text{influence of ambient temperature digital}^2 + \text{influence of voltage supply digital}^2)}$ | 0.126 °C |
| Measurement deviation of analog value (current output) = $\sqrt{(\text{measurement deviation digital}^2 + \text{measurement deviation D/A}^2 + \text{influence of ambient temperature digital}^2 + \text{influence of ambient temperature D/A}^2 + \text{influence of voltage supply digital}^2 + \text{influence of voltage supply D/A}^2)}$ | 0.141 °C |

The specifications for the measurement deviation correspond to 2 σ (Gaussian normal distribution).

Different measurement deviations apply in SIL mode ⇒ SIL safety manual for dTRANS T07 series (SIL designs).



Operating influences

The specifications for the measurement deviation correspond to 2 σ (Gaussian normal distribution).

Operating influences 'ambient temperature' and 'voltage supply' for RTD temperature probes

| Standard | Designation | Ambient temperature: Effect (\pm) per 1 °C change | | | Voltage supply: Effect (\pm) per 1 V change | | |
|--------------------------------|-------------|--|---|------------------|--|---|------------------|
| | | Digital ^a | | D/A ^b | Digital ^a | | D/A ^b |
| | | Maximum ^c | Related to the measured value ^d | | Maximum ^c | Related to the measured value ^d | |
| IEC 60751:2008 | Pt100 (1) | ≤ 0.02 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | 0.001 % | ≤ 0.12 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | 0.001 % |
| | Pt200 (2) | ≤ 0.026 °C | | | ≤ 0.26 °C | | |
| | Pt500 (3) | ≤ 0.014 °C | $0.002\% \times (MV - MRS)$, at least 0.009 °C | | ≤ 0.14 °C | $0.002\% \times (MV - MRS)$, at least 0.009 °C | |
| | Pt1000 (4) | ≤ 0.01 °C | $0.002\% \times (MV - MRS)$, at least 0.004 °C | | ≤ 0.01 °C | $0.002\% \times (MV - MRS)$, at least 0.004 °C | |
| JIS C1604:1984 | Pt100 (5) | ≤ 0.01 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | | ≤ 0.01 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | |
| DIN 43760, IPTS-68 | Ni100 (6) | ≤ 0.005 °C | | | ≤ 0.005 °C | | |
| | Ni120 (7) | ≤ 0.005 °C | | | ≤ 0.005 °C | | |
| GOST 6651-94 | Pt50 (8) | ≤ 0.03 °C | $0.002\% \times (MV - MRS)$, at least 0.01 °C | | ≤ 0.03 °C | $0.002\% \times (MV - MRS)$, at least 0.01 °C | |
| | Pt100 (9) | ≤ 0.02 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | | ≤ 0.02 °C | $0.002\% \times (MV - MRS)$, at least 0.005 °C | |
| OIML R84: 2003, GOST 6651-2009 | Cu50 (10) | ≤ 0.008 °C | | | ≤ 0.008 °C | | |
| | Cu100 (11) | ≤ 0.008 °C | $0.002\% \times (MV - MRS)$, at least 0.004 °C | | ≤ 0.008 °C | $0.002\% \times (MV - MRS)$, at least 0.004 °C | |
| | Ni100 (12) | ≤ 0.004 °C | | | ≤ 0.004 °C | | |
| | Ni120 (13) | ≤ 0.004 °C | | | ≤ 0.004 °C | | |
| OIML R84: 2003, GOST 6651-94 | Cu50 (14) | ≤ 0.008 °C | | | ≤ 0.008 °C | | |

^a Measured value transferred via HART®.

^b Percentage data related to the configured measuring span of the analog output signal.

^c Maximum measurement deviation related to the stated measuring range.

^d MV = measured value; MRS = measuring range start of the relevant sensor.

Operating influences 'ambient temperature' and 'voltage supply' for resistors/potentiometers (Ω)

| Standard | Designation | Ambient temperature: Effect (\pm) per 1 °C change | | | Voltage supply: Effect (\pm) per 1 V change | | |
|----------|---------------------|--|---|------------------|--|---|------------------|
| | | Digital ^a | | D/A ^b | Digital ^a | | D/A ^b |
| | | Maximum ^c | Related to the measured value ^d | | Maximum ^c | Related to the measured value ^d | |
| - | 10 to 400 Ω | ≤ 6 m Ω | $0.015\% \times (MV - MRS)$, at least 1.5 m Ω | 0.001 % | ≤ 6 m Ω | $0.015\% \times (MV - MRS)$, at least 1.5 m Ω | 0.001 % |
| - | 10 to 2000 Ω | ≤ 30 m Ω | $0.015\% \times (MV - MRS)$, at least 15 m Ω | | ≤ 30 m Ω | $0.015\% \times (MV - MRS)$, at least 15 m Ω | |

^a Measured value transferred via HART®.

^b Percentage data related to the configured measuring span of the analog output signal.

^c Maximum measurement deviation related to the stated measuring range.



^d MV = measured value; MRS = measuring range start of the relevant sensor.

Operating influences 'ambient temperature' and 'voltage supply' for thermocouples (TC)

| Standard | Designation | Ambient temperature: Effect (±) per 1 °C change | | | Voltage supply: Effect (±) per 1 V change | | |
|------------------------------|-------------|--|--|------------------|--|--|------------------|
| | | Digital ^a | | D/A ^b | Digital ^a | | D/A ^b |
| | | Maximum ^c | Related to the measured value ^d | | Maximum ^c | Related to the measured value ^d | |
| IEC 60584-1 | Type A (30) | ≤ 0.14 °C | 0.0055 % × (MV – MRS), at least 0.03 °C | 0.001 % | ≤ 0.14 °C | 0.0055 % × (MV – MRS), at least 0.03 °C | 0.001 % |
| | Type B (31) | ≤ 0.06 °C | | | ≤ 0.06 °C | | |
| IEC 60584-1/ ASTM E988-96 | Type C (32) | ≤ 0.09 °C | 0.0045 % × (MV – MRS), at least 0.03 °C | | ≤ 0.09 °C | 0.0045 % × (MV – MRS), at least 0.03 °C | |
| ASTM E988-96 | Type D (33) | ≤ 0.08 °C | 0.004 % × (MV – MRS), at least 0.035 °C | | ≤ 0.08 °C | 0.004 % × (MV – MRS), at least 0.035 °C | |
| IEC 60584-1 | Type E (34) | ≤ 0.03 °C | 0.003 % × (MV – MRS), at least 0.016 °C | | ≤ 0.03 °C | 0.003 % × (MV – MRS), at least 0.016 °C | |
| | Type J (35) | ≤ 0.02 °C | 0.0028 % × (MV – MRS), at least 0.02 °C | | ≤ 0.02 °C | 0.0028 % × (MV – MRS), at least 0.02 °C | |
| | Type K (36) | ≤ 0.04 °C | 0.003 % × (MV – MRS), at least 0.013 °C | | ≤ 0.04 °C | 0.003 % × (MV – MRS), at least 0.013 °C | |
| | Type N (37) | ≤ 0.04 °C | 0.0028 % × (MV – MRS), at least 0.02 °C | | ≤ 0.04 °C | 0.0028 % × (MV – MRS), at least 0.02 °C | |
| | Type R (38) | ≤ 0.06 °C | 0.0035 % × (MV – MRS), at least 0.047 °C | | ≤ 0.06 °C | 0.0035 % × (MV – MRS), at least 0.047 °C | |
| | Type S (39) | ≤ 0.05 °C | | | ≤ 0.05 °C | | |
| DIN 43710 | Type T (40) | ≤ 0.01 °C | | | ≤ 0.01 °C | | |
| | Type L (41) | ≤ 0.02 °C | | | ≤ 0.02 °C | | |
| GOST R8.8585-2001 | Type U (42) | ≤ 0.01 °C | | ≤ 0.01 °C | | | |
| | Type L (43) | ≤ 0.01 °C | | ≤ 0.01 °C | | | |

^a Measured value transferred via HART®.

^b Percentage data related to the configured measuring span of the analog output signal.

^c Maximum measurement deviation related to the stated measuring range.

^d MV = measured value; MRS = measuring range start of the relevant sensor.

Operating influences 'ambient temperature' and 'voltage supply' for voltage sensors (mV)

| Standard | Designation | Ambient temperature: Effect (±) per 1 °C change | | | Voltage supply: Effect (±) per 1 V change | | |
|----------|---------------|--|-------------------------------|------------------|--|-------------------------------|------------------|
| | | Digital ^a | | D/A ^b | Digital ^a | | D/A ^b |
| | | Maximum ^c | Related to the measured value | | Maximum ^c | Related to the measured value | |
| - | -20 to 100 mV | ≤ 3 µV | | 0.001 % | ≤ 3 µV | | 0.001 % |

^a Measured value transferred via HART®.

^b Percentage data related to the configured measuring span of the analog output signal.

^c Maximum measurement deviation related to the stated measuring range.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Long-term drift

Long-term drift of RTD temperature probe

| Standard | Designation | Long-term drift (\pm) ^a | | |
|-----------------------------------|-------------|--|---|---|
| | | After 1 year | After 3 years | After 5 years |
| | | Related to the measured value | | |
| IEC 60751:2008 | Pt100 (1) | $\leq 0.016 \% \times (VM - DEM)$ or 0.04 °C | $\leq 0.025 \% \times (VM - DEM)$ or 0.05 °C | $\leq 0.028 \% \times (VM - DEM)$ or 0.06 °C |
| | Pt200 (2) | 0.25 °C | 0.41 °C | 0.50 °C |
| | Pt500 (3) | $\leq 0.018 \% \times (VM - DEM)$ or 0.08 °C | $\leq 0.03 \% \times (VM - DEM)$ or 0.14 °C | $\leq 0.036 \% \times (VM - DEM)$ or 0.17 °C |
| | Pt1000 (4) | $\leq 0.0185 \% \times (VM - DEM)$ or 0.04 °C | $\leq 0.031 \% \times (VM - DEM)$ or 0.07 °C | $\leq 0.038 \% \times (VM - DEM)$ or 0.08 °C |
| JIS C1604:1984 | Pt100 (5) | $\leq 0.015 \% \times (VM - DEM)$ or 0.04 °C | $\leq 0.024 \% \times (VM - DEM)$ or 0.07 °C | $\leq 0.027 \% \times (VM - DEM)$ or 0.08 °C |
| DIN 43760, IPTS-68 | Ni100 (6) | 0.04 °C | 0.05 °C | 0.06 °C |
| | Ni120 (7) | 0.04 °C | 0.05 °C | 0.06 °C |
| GOST 6651-94 | Pt50 (8) | $\leq 0.017 \% \times (VM - DEM)$ or 0.07 °C | $\leq 0.027 \% \times (VM - DEM)$ or 0.12 °C | $\leq 0.030 \% \times (VM - DEM)$ or 0.14 °C |
| | Pt100 (9) | $\leq 0.016 \% \times (VM - DEM)$ or 0.04 °C | $\leq 0.025 \% \times (VM - DEM)$ or 0.07 °C | $\leq 0.028 \% \times (VM - DEM)$ or 0.07 °C |
| OIML R84: 2003, GOST 6651-2009 | Cu50 (10) | 0.06 °C | 0.09 °C | 0.11 °C |
| | Cu100 (11) | $\leq 0.015 \% \times (VM - DEM)$ or 0.04 °C | $\leq 0.024 \% \times (VM - DEM)$ or 0.06 °C | $\leq 0.027 \% \times (VM - DEM)$ or 0.06 °C |
| | Ni100 (12) | 0.03 °C | 0.05 °C | 0.06 °C |
| OIML R84: 2003, GOST 6651-94 | Ni120 (13) | 0.03 °C | 0.05 °C | 0.06 °C |
| | Cu50 (14) | 0.06 °C | 0.09 °C | 0.10 °C |

^a The higher value is valid.

Long-term drift for resistors/potentiometers (Ω)

| Standard | Designation | Long-term drift (\pm) ^a | | |
|----------|---------------------|--|--|---|
| | | After 1 year | After 3 years | After 5 years |
| | | Related to the measured value | | |
| - | 10 to 400 Ω | $\leq 0.0122 \% \times (MV - MRS)$ or 12 m Ω | $\leq 0.02 \% \times (MV - MRS)$ or 20 m Ω | $\leq 0.022 \% \times (MV - MRS)$ or 22 m Ω |
| - | 10 to 2000 Ω | $\leq 0.015 \% \times (MV - MRS)$ or 144 m Ω | $\leq 0.024 \% \times (MV - MRS)$ or 240 m Ω | $\leq 0.03 \% \times (MV - MRS)$ or 295 m Ω |

^a The higher value is valid.

Long-term drift for thermocouples (TC)

| Standard | Designation | Long-term drift (\pm) ^a | | |
|------------------------------|-------------|---|---|---|
| | | After 1 year | After 3 years | After 5 years |
| | | Related to the measured value | | |
| IEC 60584-1 | Type A (30) | $\leq 0.048 \% \times (MV - MRS)$ or 0.46 °C | $\leq 0.072 \% \times (MV - MRS)$ or 0.69 °C | $\leq 0.1 \% \times (MV - MRS)$ or 0.94 °C |
| | Type B (31) | 1.08 °C | 1.63 °C | 2.23 °C |
| IEC 60584-1/ ASTM E988-96 | Type C (32) | $\leq 0.038 \% \times (MV - MRS)$ or 0.41 °C | $\leq 0.057 \% \times (MV - MRS)$ or 0.62 °C | $\leq 0.078 \% \times (MV - MRS)$ or 0.85 °C |
| ASTM E988-96 | Type D (33) | $\leq 0.035 \% \times (MV - MRS)$ or 0.57 °C | $\leq 0.052 \% \times (MV - MRS)$ or 0.86 °C | $\leq 0.071 \% \times (MV - MRS)$ or 1.17 °C |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



| Standard | Designation | Long-term drift (±) ^a | | |
|-------------------|-------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | After 1 year | After 3 years | After 5 years |
| | | Related to the measured value | | |
| IEC 60584-1 | Type E (34) | ≤ 0.024 % × (MV - MRS) or 0.15 °C | ≤ 0.037 % × (MV - MRS) or 0.23 °C | ≤ 0.05 % × (MV - MRS) or 0.31 °C |
| | Type J (35) | ≤ 0.025 % × (MV - MRS) or 0.17 °C | ≤ 0.037 % × (MV - MRS) or 0.25 °C | ≤ 0.051 % × (MV - MRS) or 0.34 °C |
| | Type K (36) | ≤ 0.027 % × (MV - MRS) or 0.23 °C | ≤ 0.041 % × (MV - MRS) or 0.35 °C | ≤ 0.056 % × (MV - MRS) or 0.48 °C |
| | Type N (37) | 0.36 °C | 0.55 °C | 0.75 °C |
| | Type R (38) | 0.83 °C | 1.26 °C | 1.72 °C |
| | Type S (39) | 0.84 °C | 1.27 °C | 1.73 °C |
| | Type T (40) | 0.25 °C | 0.37 °C | 0.51 °C |
| DIN 43710 | Type L (41) | 0.20 °C | 0.31 °C | 0.42 °C |
| | Type U (42) | 0.24 °C | 0.37 °C | 0.50 °C |
| GOST R8.8585-2001 | Type L (43) | 0.22 °C | 0.33 °C | 0.45 °C |

^a The higher value is valid.

Long-term drift for voltage sensor (mV)

| Standard | Designation | Long-term drift (±) ^a | | |
|----------|---------------|-------------------------------------|-------------------------------------|--------------------------------------|
| | | After 1 year | After 3 years | After 5 years |
| | | Related to the measured value | | |
| - | -20 to 100 mV | ≤ 0.027 % × (MV - MRS) or 5.5 µV | ≤ 0.041 % × (MV - MRS) or 8.2 µV | ≤ 0.056 % × (MV - MRS) or 11.2 µV |

^a The higher value is valid.

Long-term drift for analog output

| Long-term drift ^a (±) | | |
|----------------------------------|---------------|---------------|
| After 1 year | After 3 years | After 5 years |
| 0.021 % | 0.029 % | 0.031 % |

^a Percentages related to the configured span of the analog output signal.

Influence of the reference point

Pt100 DIN IEC 60751 class B (internal cold junction on thermocouples (TC)).

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Sensor calibration

| | |
|---|--|
| <p>Sensor transmitter matching</p> | <p>RTD sensors are among the most linear of all temperature measuring elements. Nonetheless, it is still necessary to linearize the output. For significant improvement of the temperature measurement accuracy, the device enables the use of two methods:</p> <ul style="list-style-type: none"> <p>Callendar–Van Dusen coefficient (Pt100 RTD temperature probe)</p> <p>The Callendar–Van Dusen equation is described as follows: $R_T = R_0 [1 + AT + BT^2 + C (T-100) T^3]$</p> <p>Coefficients A, B, and C are used to adapt sensors (platinum) and transmitters in order to improve the accuracy of the measuring system. The coefficients for a standard sensor are specified in IEC 60751. If no standard sensor is available or if you require even higher accuracy, the coefficients for each sensor can be calculated specifically with the help of sensor calibration.</p> <p>Linearization for copper/nickel RTD temperature probes</p> <p>The equation for the polynomial for copper/nickel is described as follows: $R_T = R_0 (1 + AT + BT^2)$</p> <p>The coefficients A and B serve to linearize nickel or copper RTD temperature probes. The exact values for the coefficients are taken from the calibration data and are specific to every sensor. The sensor-specific coefficients are then transmitted to the transmitter.</p> <p>Sensor/transmitter matching with one of the methods stated above significantly improves the accuracy of the temperature measurement of the overall system. This results from the fact that the transmitter uses the specific data of the connected sensor rather than the standardized sensor curve data for calculation of the measured temperature.</p> |
| <p>Single-point calibration (offset)</p> | <p>Shift of the sensor value</p> |
| <p>Two-point calibration (sensor trimming)</p> | <p>Correction (slope and offset) of the measured sensor value at the input of the transmitter.</p> |

Calibration of the current output

Correction of the 4 or 20 mA current output value (not possible in SIL operation).

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Voltage supply

Devices without Ex-approval

| | |
|-----------------------------|---|
| Voltage supply | (protected against polarity reversal) |
| Head transmitter | DC $11\text{ V} \leq V_{cc} \leq 42\text{ V}$ (standard) |
| | DC $11\text{ V} \leq V_{cc} \leq 32\text{ V}$ (SIL operation) |
| DIN rail device | DC $12\text{ V} \leq V_{cc} \leq 42\text{ V}$ (standard) |
| | DC $12\text{ V} \leq V_{cc} \leq 32\text{ V}$ (SIL operation) |
| Current consumption | |
| Typical | 3.6 to 23 mA |
| Minimum current consumption | 3.5 mA (4 mA in multidrop mode, not possible in SIL operation) |
| Current limit | $\leq 23\text{ mA}$ |
| Residual ripple | Permanent residual ripple $U_{ss} \leq 3\text{ V}$ with $U_b \geq 13.5\text{ V}$, $f_{max} = 1\text{ kHz}$ |

Head transmitters with Ex-approval

| | Sensor circuit | | | Auxiliary energy circuit |
|---------------------------------|-----------------|-------------------|-------------------|--------------------------|
| Max. voltage U_0 | DC 7,6 V | | | -- |
| Max. current I_0 | 13 mA | | | -- |
| Max. power P_0 | 24.7 mW | | | -- |
| Max. voltage U_i | -- | | | 30 V |
| Max. current I_i | -- | | | 130 mA |
| Max. power P_i | -- | | | 800 mW |
| Max. internal inductance L_i | negligible | | | negligible |
| Max. internal capacitance C_i | negligible | | | negligible |
| Gas group | Ex ia IIC | Ex ia IIB | Ex ia IIA | -- |
| Max. external inductance L_o | 10 mH | 50 mH | 50 mH | -- |
| Max. external capacitance C_o | 1 μF | 4.5 μF | 6.7 μF | -- |

DIN rail devices with Ex-approval

| | Sensor circuit | | | Auxiliary energy circuit |
|---------------------------------|--------------------|-------------------|-------------------|--------------------------|
| Max. voltage U_0 | DC 9 V | | | -- |
| Max. current I_0 | 13 mA | | | -- |
| Max. power P_0 | 29.3 mW | | | -- |
| Max. voltage U_i | -- | | | 30 V |
| Max. current I_i | -- | | | 130 mA |
| Max. power P_i | -- | | | 770 mW |
| Max. internal inductance L_i | negligible | | | negligible |
| Max. internal capacitance C_i | negligible | | | negligible |
| Gas group | Ex ia IIC | Ex ia IIB | Ex ia IIA | -- |
| Max. external inductance L_o | 5 mH | 20 mH | 50 mH | -- |
| Max. external capacitance C_o | 0.93 μF | 3.8 μF | 4.8 μF | -- |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Environmental influences

Ambient temperature for all devices **without** Ex-approval

| | |
|--------------------|---------------|
| Standard operation | -40 to +85 °C |
| SIL operation | -40 to +70 °C |

Ambient temperature for head transmitters **with** Ex-approval (**without** display)

| Temperature class | Ambient temperature zone 1 | Ambient temperature zone 0 |
|-------------------|----------------------------|----------------------------|
| T6 | -40 to +58 °C | -40 to +46 °C |
| T5 | -40 to +75 °C | -40 to +60 °C |
| T4 | -40 to +85 °C | -40 to +60 °C |

Ambient temperature for head transmitters **with** Ex-approval (**with** display^a)

| Temperature class | Ambient temperature zone 1 | Ambient temperature zone 0 |
|-------------------|----------------------------|----------------------------|
| T6 | -40 to +55 °C | -- |
| T5 | -40 to +70 °C | -- |
| T4 | -40 to +85 °C | -- |

^a At temperatures below -20 °C the display may react sluggishly; at temperatures below -30 °C the display may no longer be readable.

Ambient temperature for DIN rail devices **with** Ex-approval

| Temperature class | Ambient temperature zone 1 | Ambient temperature zone 0 |
|-------------------|----------------------------|----------------------------|
| T6 | -40 to +46 °C | -- |
| T5 | -40 to +61 °C | -- |
| T4 | -40 to +85 °C | -- |

| | |
|---|--|
| Storage temperature | |
| Head transmitter | -50 to +100 °C |
| DIN rail device | -40 to +100 °C |
| Altitude | Up to 4000 m above mean sea level in accordance with IEC 61010-1, CAN/CSA C22.2 No. 61010-1 |
| Climate class | |
| Head transmitter | Climate class C1 in accordance with EN 60654-1 |
| DIN rail device | Climate class B2 in accordance with EN 60654-1 |
| Humidity | |
| Condensation in accordance with IEC 60 068-2-33 | Permissible for head transmitter in terminal head form B, not permissible for DIN rail device |
| Maximum relative humidity | 95 % in accordance with IEC 60068-2-30 |
| Protection type | |
| Head transmitter | IP00 |
| Head transmitter in the field enclosure | IP66/67 (NEMA Type 4x encl.) |
| DIN rail device | IP20 |
| Shock and vibration resistance | |
| Head transmitter | Shock resistance in accordance with KTA 3505 (section 5.8.4 Shock test) 2 to 100 Hz at 4 g (increased vibration stress) |
| DIN rail device | 2 to 100 Hz at 0.7 g (general vibration stress) |
| Electromagnetic compatibility (EMC) | |
| Interference immunity | In accordance with all relevant requirements of the IEC/EN 61326 series and the NAMUR EMC Recommendation (NE21). Details can be found in the declaration of conformity. All tests were passed both with and without the digital HART communication running. Maximum measurement deviation < 1 % of the measuring range Industrial requirement |
| Interference emission | Class B – Households and small businesses |
| Measurement category | Measurement category II in accordance with IEC 61010-1. The measurement category is intended for measurements in electrical circuits that are electrically connected directly to the low-voltage network. |
| Pollution degree | Pollution degree 2 in accordance with IEC 61010-1 |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Case

All materials used are RoHS compliant.

| | Versions for B-head mounting | Versions for DIN-rail mounting |
|----------------------------------|--|--------------------------------|
| Material of enclosure body | Polycarbonate (PC), corresponds to UL94, V-2 UL recognized | |
| Material of connection terminals | Nickel-plated brass with gold-plated contacts | |
| Potting material | WEVO PU 403 FP / FL | - |
| Terminal design | Screw terminals | |
| Wire design | Rigid or flexible ^a | |
| Conductor cross section | ≤ 2.5 mm ² (14 AWG) | |
| Mounting types | In terminal head, form B | On DIN-rail |
| | In field enclosure (wall or pipe mounting) | |
| | On DIN rail (with mounting element) | |
| Installation position | Any | |
| Weight | ~ 40 to 50 g | ~ 100 g |

^a Recommendation: do not use ferrules.

Approvals and approval marks

The current editions of all safety-relevant standards can be found in the declarations of conformity, which are shown in the safety manuals for the device. The declarations of conformity are also available for download on the manufacturer's website.

Transmitter dTRANS T07

| Approval mark | Test facility | Certificate/ Certification number | Inspection basis | Valid for |
|---------------|---------------------------|--------------------------------------|--------------------------------------|--|
| ATEX | Buero Veritas | EPS 17 ATEX 1 129 X | EN 60079-0 | Type 707085/... |
| | | | | Type 707086/... |
| | | | | Type 707087/... Type 707088/... |
| IECEX | Buero Veritas | IECEX EPS 17.0075X | IEC 60079-0 | Type 707085/... |
| | | | | Type 707086/... |
| | | | | Type 707087/... Type 707088/... |
| SIL | TÜV Süd | Z10 17 05 01028 0001 | IEC 61508 | Type 707081/... Type 707083/... Type 707086/... Type 707088/... |
| c UL us | Underwriters Laboratories | E201387 | UL 61010-1, CAN/CSA-22.2 No. 61010-1 | All types |

Plug-in display BD7

| Approval mark | Test facility | Certificate/ Certification number | Inspection basis | Valid for |
|---------------|---------------|--------------------------------------|------------------|-----------|
| ATEX | Buero Veritas | EPS 18 ATEX 1 113 X | EN 60079-0 | BD7 |
| IECEX | Buero Veritas | IECEX EPS 18.0048X | IEC 60079-0 | |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Operation


Operation on the device

Operation of the head transmitter

There are no display and control elements on the head transmitter. As an option, it is possible to use the plug-on display BD7 together with the head transmitter.

The plug-on display provides plain text information and uses an optional bar graph to show the current measured value and the designation of the measurement point. In the event that a fault is present in the measurement chain, this is indicated on the display with the channel designation and error number.

DIP switches are located on the rear of the plug-on display BD7. These are used to adjust hardware settings such as write protection.

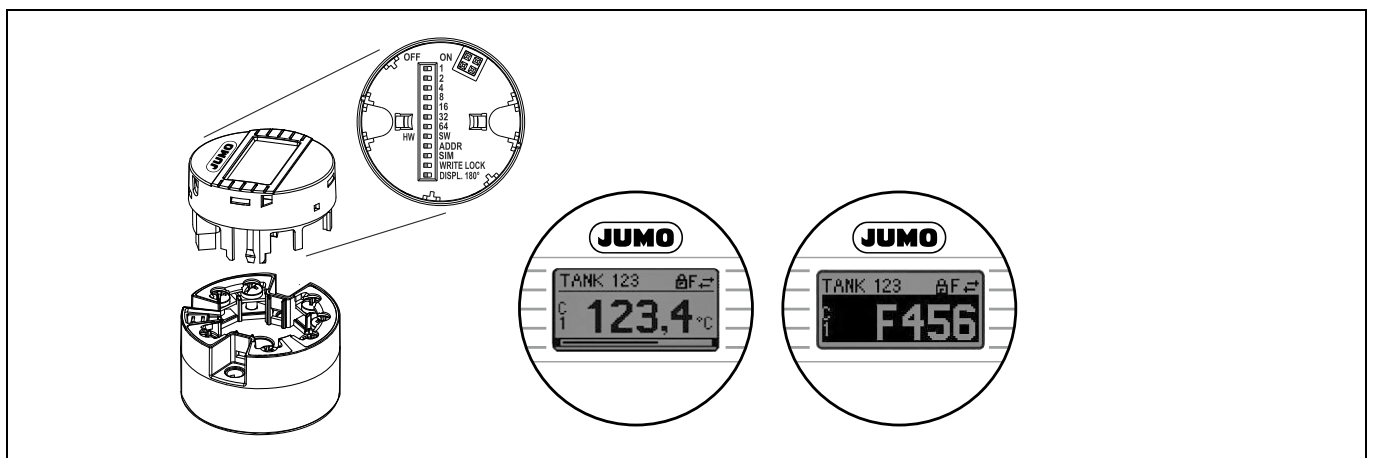

Operation of the DIN rail device

| | | |
|--|--|---|
| | (1) HART communication ports (2 mm) for startup and parameterization with a field communicator | |
| | (2) Power LED | If the LED lights up green, this signals that the voltage supply is OK. |
| | (3) Status LED | Off: No diagnostic message Illuminated red: Category F diagnostic message Flashing red: Category C, S or M diagnostic message |
| | (4) Internal service interface | Not intended for use |

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net


JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com



Remote control/configuration

The devices are configured via the HART® communication. To do this, either a field communicator with a device-specific JUMO DD (Device Description) file can be used, or a PC/laptop with installed PACTWare™ user interface and JUMO DTM (Device Type Manager) driver.

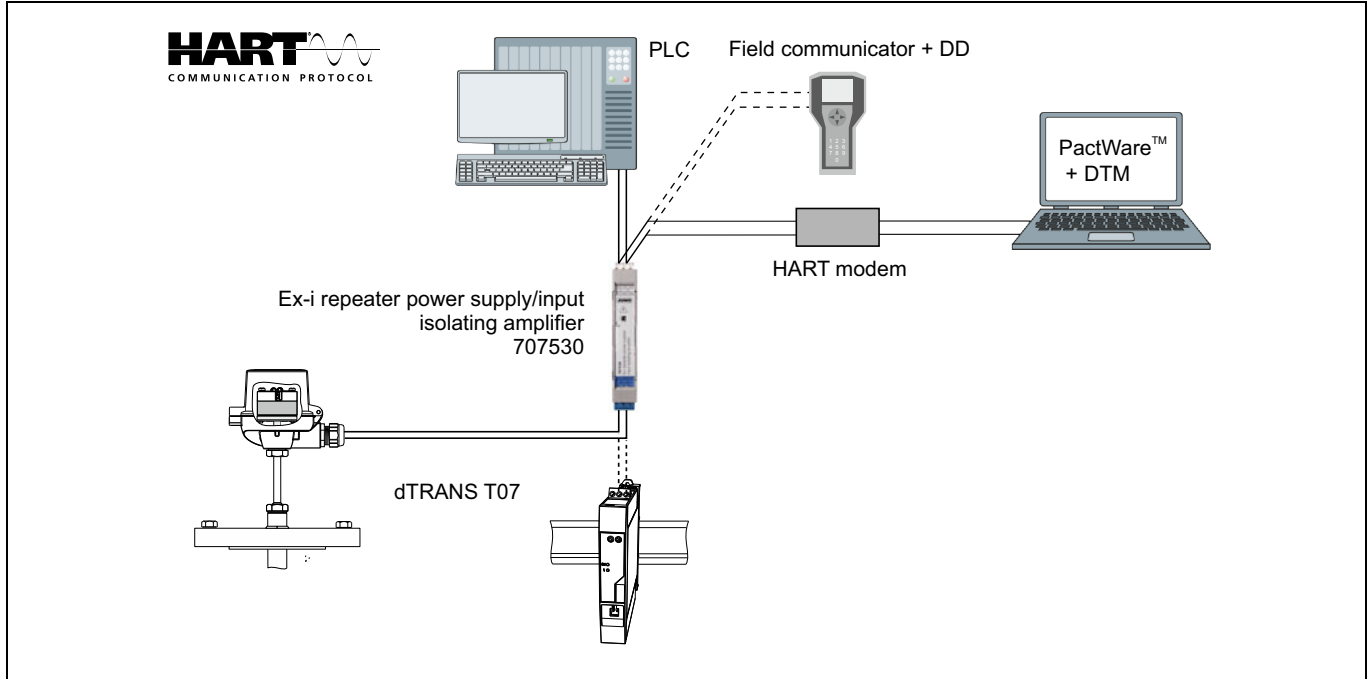

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net


JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com




Dimensions

Head transmitter

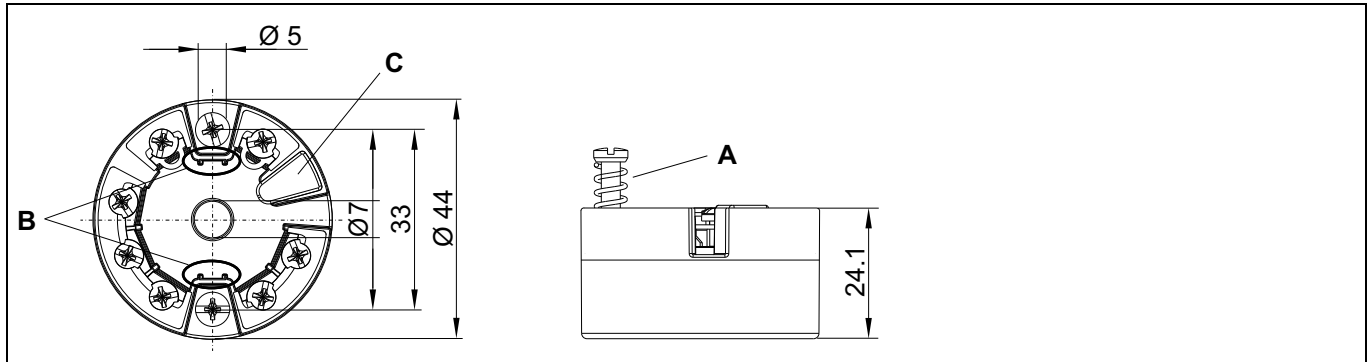

- A Spring deflection mounting screws ≥ 5 mm (not with US-M4 mounting screws)
- B Mounting elements for plug-on display BD7
- C internal service interface (not intended for use)

DIN rail device

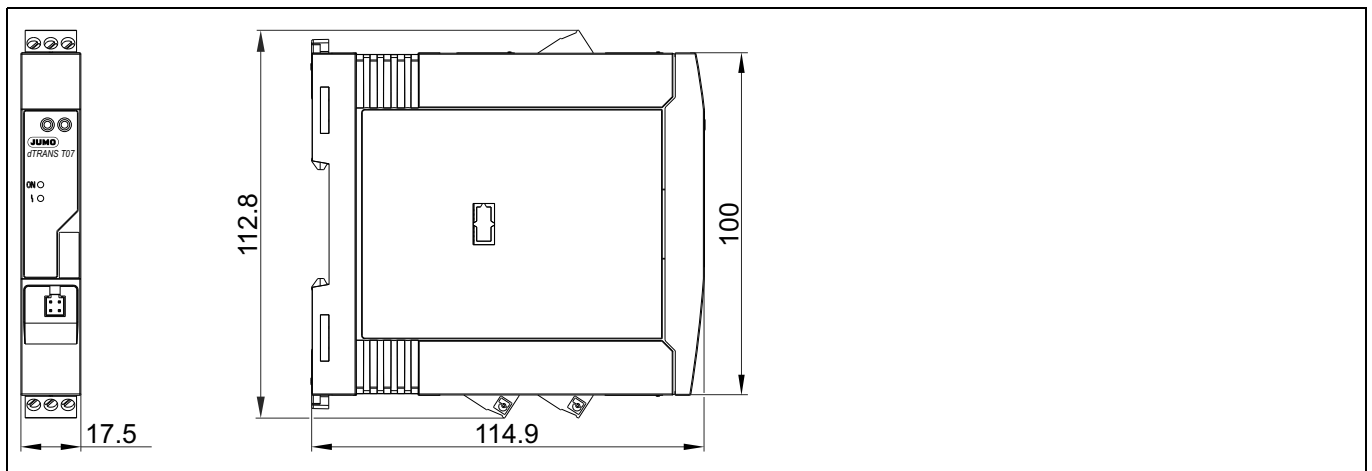

Terminal head for dTRANS T07

| AB 7 with display window in the cap | | Specifications | |
|-------------------------------------|-------|-------------------------------|--------------------------------------|
| | | Cable inlets | 1 |
| | | Ambient temperature | -50 to +150 °C without cable fitting |
| | | Material | |
| | | Enclosure | Aluminum, polyester powder coating |
| | | Seals | Silicone |
| | | Cable inlet screw connections | M20 × 1.5 |
| | | Protective fitting connection | M24 × 1.5 |
| | | Color | |
| | | Head | Light gray |
| | | Cap | Light gray |
| Weight | 420 g | | |


JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Field enclosure for dTRANS T07
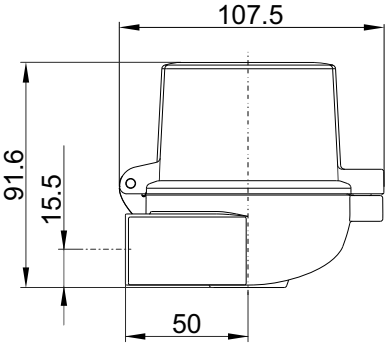
| | | |
|---|-------------------------------|--------------------------------------|
| <p>FG 7 with display window in the cap</p>  | <p>Specifications</p> | |
| | Cable inlets | 2 |
| | Ambient temperature | -50 to +150 °C without cable fitting |
| | Material | Aluminum, polyester powder coating |
| | Seals | Silicone |
| | Cable inlet screw connections | M20 × 1.5 (2×) |
| | Color | Light gray |
| | Head | Light gray |
| | Cap | Light gray |
| | Weight | 420 g |




Connection diagram


The connection diagram in the data sheet provides preliminary information about the connection possibilities. Only use the operating manual for the electrical connection. The knowledge and the correct technical execution of the safety information/instructions contained in these documents are a prerequisite for installation, electrical connection, and startup as well as for safety during operation.

Connection examples

Types without Ex-approval (707080 to 707083)

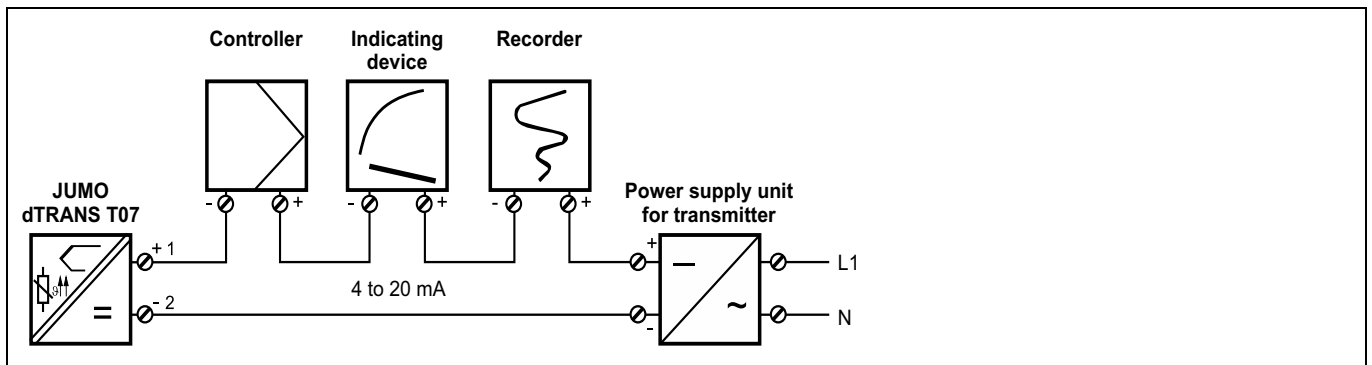

Types with Ex-approval (707085 to 707088)

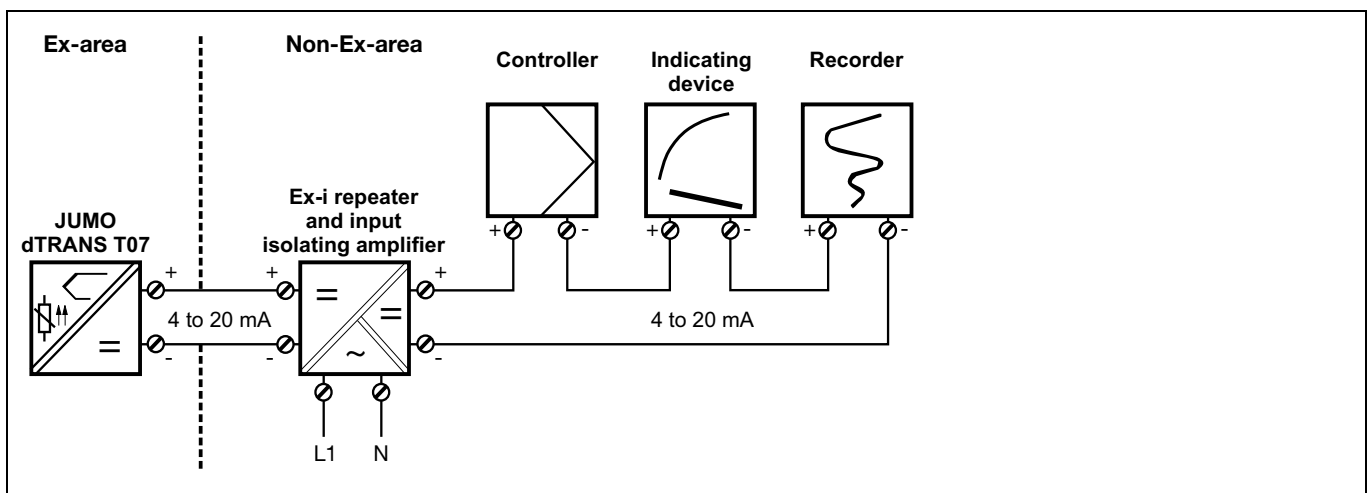

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Terminal assignment for the head transmitter

For the connection, it is possible to use both rigid and flexible wires with a conductor cross section $\leq 2.5 \text{ mm}^2$.

From a sensor wire length of 30 m a shielded wire must be used. The use of shielded wires is generally recommended.



| Connection for | Explanations | Terminals |
|---|--|------------|
| Voltage supply DC 11 to 42 V (standard) DC 11 to 32 V (SIL) | $R_b \text{ max.} = (U_b \text{ max.} - 11 \text{ V}) \div 0.023 \text{ A}$ R_b = load resistance U_b = voltage supply | 1 + 2 - |
| Current output 4 to 20 mA | | |
| HART communication | Burden $\geq 250 \Omega$ required in the signal circuit | |

Analog input (sensor input) 1

| | | |
|--|---|--|
| RTD temperature probe 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| RTD temperature probe 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| RTD temperature probe 4-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| Resistance/potentiometer 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 4-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| Thermocouple | | |
| Voltage sensor | | |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



| Connection for | Explanations | Terminals |
|--|---|-----------|
| Analog input (sensor input) 2 | | |
| RTD temperature probe 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| RTD temperature probe 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| Resistance/potentiometer 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current $\leq 0.3 \text{ mA}$ ▪ Sensor line resistance max. 50 Ω per line | |
| Thermocouple | | |
| Voltage sensor | | |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Terminal assignment for DIN rail devices

For the connection, it is possible to use both rigid and flexible wires with a conductor cross section $\leq 2.5 \text{ mm}^2$.

From a sensor wire length of 30 m a shielded wire must be used. The use of shielded wires is generally recommended.



| Connection for | Explanations | Terminals |
|--|---|-----------|
| Voltage supply DC 12 to 42 V (standard) DC 12 to 32 V (SIL) Current output 4 to 20 mA HART® communication | $R_b \text{ max.} = (U_b \text{ max.} - 12 \text{ V}) \div 0.023 \text{ A}$ R_b = load resistance U_b = voltage supply Burden $\geq 250 \Omega$ required in the signal circuit | |
| Ammeter | For testing the output current | |
| HART® communication | On the front of the unit, for field communicator or similar | |

Analog input (sensor input) 1

| | | |
|--|---|--|
| RTD temperature probe 2-wire circuit | <ul style="list-style-type: none"> • Sensor current $\leq 0.3 \text{ mA}$ • Compensation for the line resistance is possible (0 to 30 Ω) | |
| RTD temperature probe 3-wire circuit | <ul style="list-style-type: none"> • Sensor current $\leq 0.3 \text{ mA}$ • Sensor line resistance max. 50 Ω per line | |
| RTD temperature probe 4-wire circuit | <ul style="list-style-type: none"> • Sensor current $\leq 0.3 \text{ mA}$ • Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 2-wire circuit | <ul style="list-style-type: none"> • Sensor current $\leq 0.3 \text{ mA}$ • Compensation for the line resistance is possible (0 to 30 Ω) | |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



| Connection for | Explanations | Terminals |
|--|--|-----------|
| Resistance/potentiometer 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 4-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Sensor line resistance max. 50 Ω per line | |
| Thermocouple | | |
| Voltage sensor | | |

Analog input (sensor input) 2

| | | |
|--|---|--|
| RTD temperature probe 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| RTD temperature probe 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Sensor line resistance max. 50 Ω per line | |
| Resistance/potentiometer 2-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Compensation for the line resistance is possible (0 to 30 Ω) | |
| Resistance/potentiometer 3-wire circuit | <ul style="list-style-type: none"> ▪ Sensor current ≤ 0.3 mA ▪ Sensor line resistance max. 50 Ω per line | |
| Thermocouple | | |
| Voltage sensor | | |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Order details

| (1) Basic type | | | | | | | | |
|--------------------------------|---|---|---|---|---|---|---|--------|
| | | | | | | | | |
| | | | | | | | | 707080 |
| | | | | | | | | 707081 |
| | | | | | | | | 707082 |
| | | | | | | | | 707083 |
| | | | | | | | | 707085 |
| | | | | | | | | 707086 |
| | | | | | | | | 707087 |
| | | | | | | | | 707088 |
| | | | | | | | | |
| (2) Configuration | | | | | | | | |
| X | X | X | X | X | X | X | X | 8 |
| | | | | | | | | |
| (3) Electrical connection type | | | | | | | | |
| X | X | X | X | X | X | X | X | 06 |

Order code / -
 Order example 707080 / 8 - 06

Scope of delivery

| | Type | | | | | | | |
|--|--------|--------|--------|--------|--------|--------|--------|--------|
| | 707080 | 707081 | 707082 | 707083 | 707085 | 707086 | 707087 | 707088 |
| Transmitter in the version ordered | X | X | X | X | X | X | X | X |
| Operating manual | -- | -- | -- | -- | -- | -- | -- | -- |
| SIL safety manual | -- | X | -- | X | -- | X | -- | X |
| Ex safety manual | -- | -- | -- | -- | X | X | X | X |
| Mounting materials (for mounting in the terminal head) | X | X | -- | -- | X | X | -- | -- |
| Quick start guide | X | X | X | X | X | X | X | X |

Accessories

| Designation | Part no. |
|---|----------|
| BD7 plug-in display for dTRANS T07 BD7 | 00672701 |
| AB7 terminal head for dTRANS T07 B | 00672702 |
| FG7 field housing with display window for dTRANS T07 B | 00672705 |
| MW7 wall mounting set for field housing | 00672707 |
| MR7 tube mounting set for field housing | 00672708 |
| HART modem USB | 00443447 |
| Mounting element for mounting type 707080 B on DIN rail TH 35 | 00352463 |
| End holder (screwable) for DIN rail TH 35 | 00528648 |
| Ex-i repeater power supply/input isolating amplifier type 707530/38 | 00577948 |