

# Cable tie BELTO® with flat head




BELTO®



## BELTO®

<b>Material:</b>	PA 6.6	PA 6.6 HT
<b>Colour:</b>	black - natural	black
<b>Operating temperature:</b>	-40 to +85°C +150°C short-term	-40 to +110°C +180°C short-term
<b>Serrations:</b>	external	
<b>Flame resistance:</b>	V2 UL94	
<b>Specifications:</b>	halogen free EN 45545-2	

**Application:** BELTO's flat, patented fixing head is suitable for any application where the space requirement of cable harnesses must be reduced. It integrates perfectly into the volume of the wiring harness. These cable ties are equipped with a pre-assembly system allowing closing and re-opening until final tightening. No risk of damage to cables, installations and users.

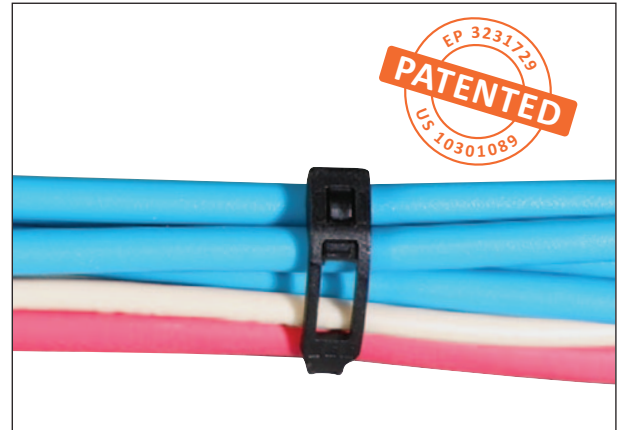


### • BELTO®

type	article number		dimensions length x width mm	maxi. bundle Ø mm	tensile strength daN	pcs	
	natural	black					
BELTO® 100/25	0122 1100 018	0122 1100 010	100 x 2,5	21	8	100	
BELTO® 150/25	0122 1150 018	0122 1150 010	150 x 2,5	38	8	100	
BELTO® 200/25	0122 1200 018	0122 1200 010	200 x 2,5	50	8	100	
BELTO® 225/46	0122 1225 018	0122 1225 010	225 x 4,6	55	22	100	
BELTO® 300/46	0122 1300 018	0122 1300 010	300 x 4,6	80	22	100	<i>New</i>
BELTO® 400/46	0122 1400 018	0122 1400 010	400 x 4,6	110	22	100	

### • BELTO® HT (for high temperatures)

type	article number	dimensions length x width mm	maxi. bundle Ø mm	tensile strength daN	pcs	
BELTO® HT 100/25	0122 2100 010	100 x 2,5	21	8	100	
BELTO® HT 150/25	0122 2150 010	150 x 2,5	38	8	100	
BELTO® HT 200/25	0122 2200 010	200 x 2,5	50	8	100	
BELTO® HT 225/46	0122 2225 010	225 x 4,6	55	22	100	
BELTO® HT 300/46	0122 2300 010	300 x 4,6	80	22	100	<i>New</i>
BELTO® HT 400/46	0122 2400 010	400 x 4,6	110	22	100	



Bag available with a European suspension hole.

C16/1-01



C16/1-02



Operating  
instruction  
in video



# SES-QUICK cable ties SL

for general use

PA 6.6 natural - black























SES-QUICK

-40 to +85°C



## • SL cable ties with inside serrations

type		article number		dimensions length x width mm	maximum bundle Ø mm	tensile strength daN		
		natural (NL)	black (BK)					
85/24	SL-M*	0186 0010 018	0186 0960 010	85 x 2,4	16	8	1 000	
85/24	SL-C	0186 0011 018	0186 0975 010	85 x 2,4	16	8	100	
100/25	SL-M*	0186 0020 018	0186 0961 010	100 x 2,5	20	8	1 000	
100/25	SL-C	0186 0021 018	0186 0976 010	100 x 2,5	20	8	100	
150/26	SL-M*	0186 0022 018	0186 0962 010	150 x 2,6	40	8	1 000	
150/26	SL-C	0186 0023 018	0186 0977 010	150 x 2,6	40	8	100	
200/26	SL-M*	0186 0210 018	0186 0963 010	200 x 2,6	50	8	1 000	
200/26	SL-C	0186 0610 018	0186 0978 010	200 x 2,6	50	8	100	
145/34	SL-M*	0186 0030 018	0186 0964 010	145 x 3,4	35	13	1 000	
145/34	SL-C	0186 0031 018	0186 0979 010	145 x 3,4	35	13	100	
210/34	SL-M	0186 0220 018	0186 0965 010	210 x 3,4	55	13	1 000	
210/34	SL-C	0186 0620 018	0186 0980 010	210 x 3,4	55	13	100	
300/36	SL-M	0186 0230 018	0186 0966 010	295 x 3,6	76	13	1 000	
300/36	SL-C	0186 0630 018	0186 0981 010	295 x 3,6	76	13	100	
370/36	SL-C	0186 0240 018	0186 0967 010	370 x 3,6	102	13	100	
160/46	SL-M	0186 0250 018	0186 0957 010	160 x 4,6	40	22	1 000	
160/46	SL-C	0186 0650 018	0186 0974 010	160 x 4,6	40	22	100	
185/46	SL-M	0186 0040 018	0186 0968 010	185 x 4,6	47	22	1 000	
185/46	SL-C	0186 0041 018	0186 0983 010	185 x 4,6	47	22	100	
200/48	SL-M	0186 0046 018	0186 0046 010	200 x 4,8	50	22	1 000	
200/48	SL-C	0186 0045 018	0186 0045 010	200 x 4,8	50	22	100	
250/46	SL-M	0186 0540 018	0186 0958 010	250 x 4,6	60	22	1 000	
250/46	SL-C	0186 0545 018	0186 0959 010	250 x 4,6	60	22	100	
300/46	SL-M	0186 0235 018	0186 0969 010	300 x 4,6	76	22	1 000	
300/46	SL-C	0186 0635 018	0186 0984 010	300 x 4,6	76	22	100	
380/47	SL-C	0186 0050 018	0186 0970 010	380 x 4,7	109	22	100	
180/76	SL-C	0186 0260 018	0186 0987 010	180 x 7,6	47	54	100	
240/76	SL-C	0186 0270 018	0186 0988 010	240 x 7,6	55	54	100	
300/76	SL-C	0186 0280 018	0186 0989 010	300 x 7,6	76	54	100	
365/76	SL-C	0186 0060 018	0186 0971 010	365 x 7,6	100	54	100	
450/76	SL-C	0186 0069 018	0186 0069 010	450 x 7,6	128	54	100	
550/90	SL-C	0186 0062 018	0186 0973 010	550 x 8,9	155	79	100	
780/90	SL-C	0186 0290 018	0186 0972 010	775 x 8,9	230	79	100	
230/130	SL-C	0186 0170 018	0186 0170 010	230 x 13	55	114	100	
480/130	SL-C	0186 0171 018	0186 0171 010	480 x 13	120	114	100	
580/130	SL-L	0186 0172 018	0186 0172 010	580 x 13	155	114	50	
730/130	SL-C	0186 0173 018	0186 0173 010	730 x 13	204	114	100	
880/130	SL-L	0186 0174 018	0186 0174 010	880 x 13	248	114	50	
1030/130	SL-C	0186 0175 018	0186 0175 010	1030 x 13	295	114	100	



\* Packed per 10 bundles of 100 pieces.



Bag available with a European suspension hole.