

- According to DIN EN 61810-1, DIN EN 61810-3 (Type A)
- With forcibly guided contacts
- High switching reliability due to crown contacts
- Low rated power consumption
- High mechanical service life
- High temperature range - 40 ... + 85 °C
- High continuous thermal current $I_{th} = 8$ A
- Compact size
- Optionally wash proof

Applications

- To be used in circuits for safety applications
- Escalators and walkways
- Elevators for men and load
- Railway technology

Approvals and Markings



Technical Data

Relay type	OA 5611	OA 5612
1.0 Relay coil		
1.1 Nominal voltage	DC 6, 12, 24, 48, 60, 110 V (others on request)	
1.2 Nominal consumption	0.6 W	0.8 W / 1.0 W ³⁾
1.11 Voltage range	0.7 ... 1.4 U _N	
1.13 Holding power (at 0.5 x U _N)	0.15 W	0.20 W / 0.24 W ³⁾
2.0 Contacts		
2.1 Contact arrangement (Type A)	2 NO / 2 NC 3 NO / 1 NC	2 NO / 4 NC 3 NO / 3 NC 4 NO / 2 NC 5 NO / 1 NC
2.2 Contact material	AgSnO ₂ + 0.2 µm Au; AgNi + 0.2 µm Au, AgNi + 5 µm Au	
2.3 Rated insulation voltage	AC 250 V	
Switching voltage min./max	AC/DC 10 V / DC 250 V, AC 400 V (AC/DC 2 V / 60 V) ¹⁾	
2.4 Limit. contin. current I _{th} max. Switching current min./max	3 x 8 A e.g. 5 x 8 A (see operating voltage limit curve) > 10 mA ⁴⁾ / 8 A (2 mA / 0.3 A) ¹⁾	
2.5 Switching power min./max. Switching power min./max	0.1 VA / 2000 VA (10 mVA / 12 VA) ¹⁾ 0.1 W ⁴⁾ / 200 W (10 mW / 12 W) ¹⁾ (see limit curve for arc-free operation)	
2.6 Switching capacity to IEC/EN 60947-5-1		
AC 15 ⁵⁾	NO: AC 250 V / 2 A	NC: AC 250 V / 1 A
AC 15 ⁶⁾	NO: AC 250 V / 3 A	NC: AC 250 V / 2 A
DC 13 ⁵⁾	NO: DC 24 V / 1 A	NC: DC 24 V / 1 A
DC 13 ⁵⁾ at 0.1 Hz to UL 508	NO: DC 24 V / 4 A	NC: DC 24 V / 4 A
	B300	
2.7 Electrical life	At 1 s ON, 1 s OFF (see contacts service life)	
at AC 230 V, 5 A, cosφ = 1	> 3 x 10 ⁵ switching cycles AgSnO ₂	> 2 x 10 ⁵ switching cycles AgNi 10
at AC 230 V, 8 A, cosφ = 1	> 1.5 x 10 ⁵ switching cycles AgSnO ₂	> 10 ⁵ switching cycles AgNi 10
2.8 Switching frequency max.	10 switching cycles/s	
2.9 Response time / Release time	Typically 20 ms / Typically 6 ms	
2.10 Contact force	≥ 10 cN	
2.14 Contact gap	> 0.5 mm ²⁾	
3.0 Other		
3.1 Mechanical life	≥ 50 x 10 ⁶ switching cycles	
3.2 Temperature range	- 40 ... + 85 °C	- 40 ... + 85 °C
3.3 Degree of protection	Solder line proof RT II as option wash proof RT III	
3.4 Test procedure	A (group mounting)	
3.5 Vibration resistance	10 ... < 60 Hz; 0,35 mm Amplitude IEC/EN 60068-2-6 60 ... 200 Hz, ≤ 5g (all contacts) IEC/EN 60068-2-6	
3.6 Climate resistance	40 / 085 / 04; A / B / D IEC/EN 60068-1	
3.7 Short circuit strength 1 kA / AC 250 V	AgSnO ₂ NO: 10 A gG / gL / NC: 10 A gG / gL IEC/EN 60947-5-1 AgNi NO: 6 A gG / gL / NC: 6 A gG / gL IEC/EN 60947-5-1	

¹⁾ Values for AgNi 10-Contacts + 5 µm Au

³⁾ OA 5612.50 (2 NO / 4 NC)

⁵⁾ Values for AgNi-Contacts

²⁾ Over entire service life acc. to DIN EN 61810-3

⁴⁾ Typical values for AgSnO₂ and AgNi

⁶⁾ Values for AgSnO₂-Contacts

Technical Data

3.8	Insulation acc. to IEC 60664-1, EN 50178		
	Rated insulation voltage		AC 250 V
	Pollution degree		3
	Overtoltage category		III
	Test voltage		
	Contact - Coil (1 min)		≥ AC 4 kV eff.
	Contact - Contact (1min)		≥ AC 2.5 kV eff.
	Contact open (1 min)		≥ AC 1.5 kV eff.
	Transient voltage		
	Contact - Coil (1,2 - 50 μs)		≥ 6 kV
	Clearance and creepage distances		
	Contact - Coil		≥ 8 mm
	Contact side-Contact side		≥ 4.5 mm
	Contact - Contact		≥ 4.5 mm
3.9	Weight	Approx. 35 g	Approx. 38 g
4.0 Packing			
4.1	On cardboard	30 pieces	20 pieces
4.2	In case package	150 pieces	100 pieces
5.0 Solder method			
5.1	Solder method /-temperature /-duration	Wave soldering / 260 °C / 5 s	

Design versions

U _N (DC V)	Voltage range (DC V)	OA 5611			OA 5612					
		R _{Coil} Ω ± 10%	.48	.52	R _{Coil} Ω ± 10%	.18	.54	.60	R _{Coil} Ω ± 10%	.50
			3NO, 1NC	2NO, 2NC		3NO, 3NC	4NO, 2NC	5NO, 1NC		2NO, 4NC

AgSnO-contacts + 0.2 μm Au

6	4.2 ... 8.4	56	2491	2521	45	2401	2461	2571	36	2431
12	8.4 ... 16.8	240	2492	2522	180	2402	2462	2572	145	2432
24	16.8 ... 33.6	960	2493	2523	720	2403	2463	2573	600	2433
48	33.6 ... 67.2	3840	2494	2524	2880	2404	2464	2574	2300	2434
60	42.0 ... 84.0	6000	2495	2525	4500	2405	2465	2575	3600	2435
110	77.0 ... 154.0	20150	2496	2526	15125	2406	2466	2576	12100	2436

AgNi-contacts + 0.2 μm Au

6	4.2 ... 8.4	56	2501	2531	45	2411	2471	2581	36	2441
12	8.4 ... 16.8	240	2502	2532	180	2412	2472	2582	145	2442
24	16.8 ... 33.6	960	2503	2533	720	2413	2473	2583	600	2443
48	33.6 ... 67.2	3840	2504	2534	2880	2414	2474	2584	2300	2444
60	42.0 ... 84.0	6000	2505	2535	4500	2415	2475	2585	3600	2445
110	77.0 ... 154.0	20150	2506	2536	15125	2416	2476	2586	12100	2446

AgNi-contacts + 5 μm Au

6	4.2 ... 8.4	56	2511	2541	45	2421	2481	2591	36	2451
12	8.4 ... 16.8	240	2512	2542	180	2422	2482	2592	145	2452
24	16.8 ... 33.6	960	2513	2543	720	2423	2483	2593	600	2453
48	33.6 ... 67.2	3840	2514	2544	2880	2424	2484	2594	2300	2454
60	42.0 ... 84.0	6000	2515	2545	4500	2425	2485	2595	3600	2455
110	77.0 ... 154.0	20150	2516	2546	15125	2426	2486	2596	12100	2456

Ordering Example

OA 5611 . . . / / 61*)


- Pin configuration
- L = Solder line proof RT II
- W = Wash proof RT III
- Design version
- Contact arrangement (Type A)
- .48 3 NO, 1 NC
- .52 2 NO, 2 NC
- Relay type

Notes


For the use and processing of our PCB relays, please refer to the **application and processing instructions** at www.dold.com

*) / 61 cURus approval



Characteristics

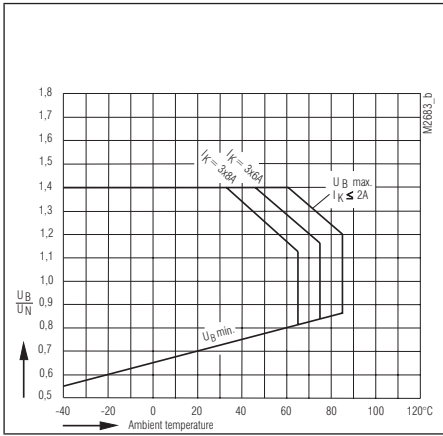


Operating voltage limit curve OA 5611

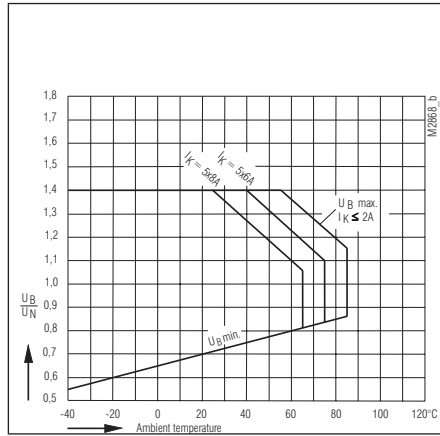


Operating voltage limit curve OA 5612

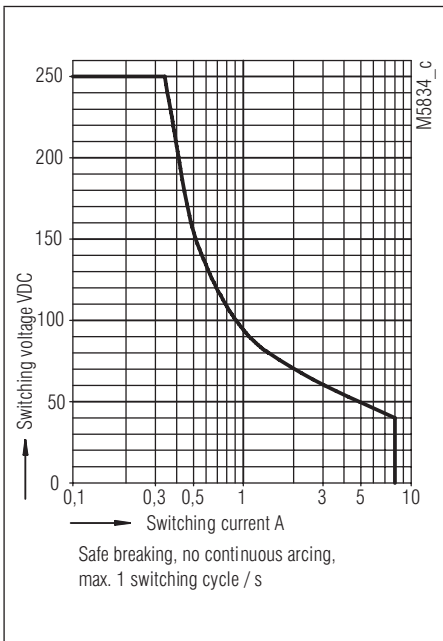


Arc limit curve (load limit curve)

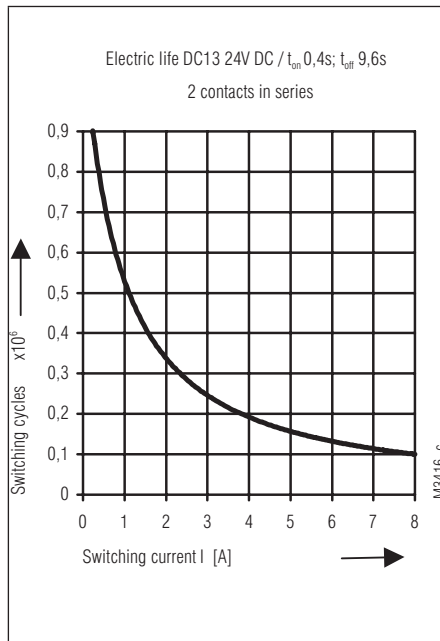



Electric life

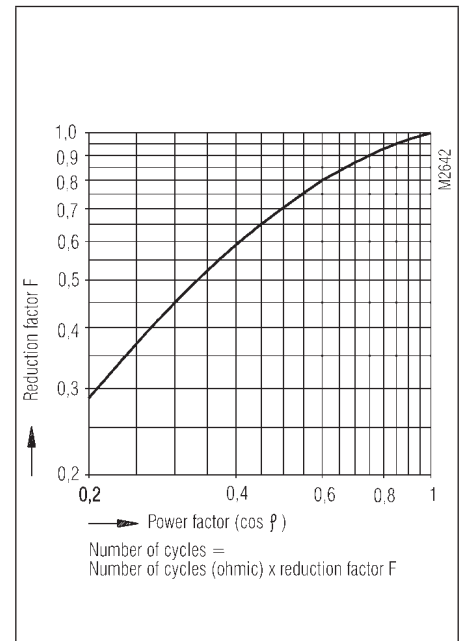

Reduction factor for inductive loads

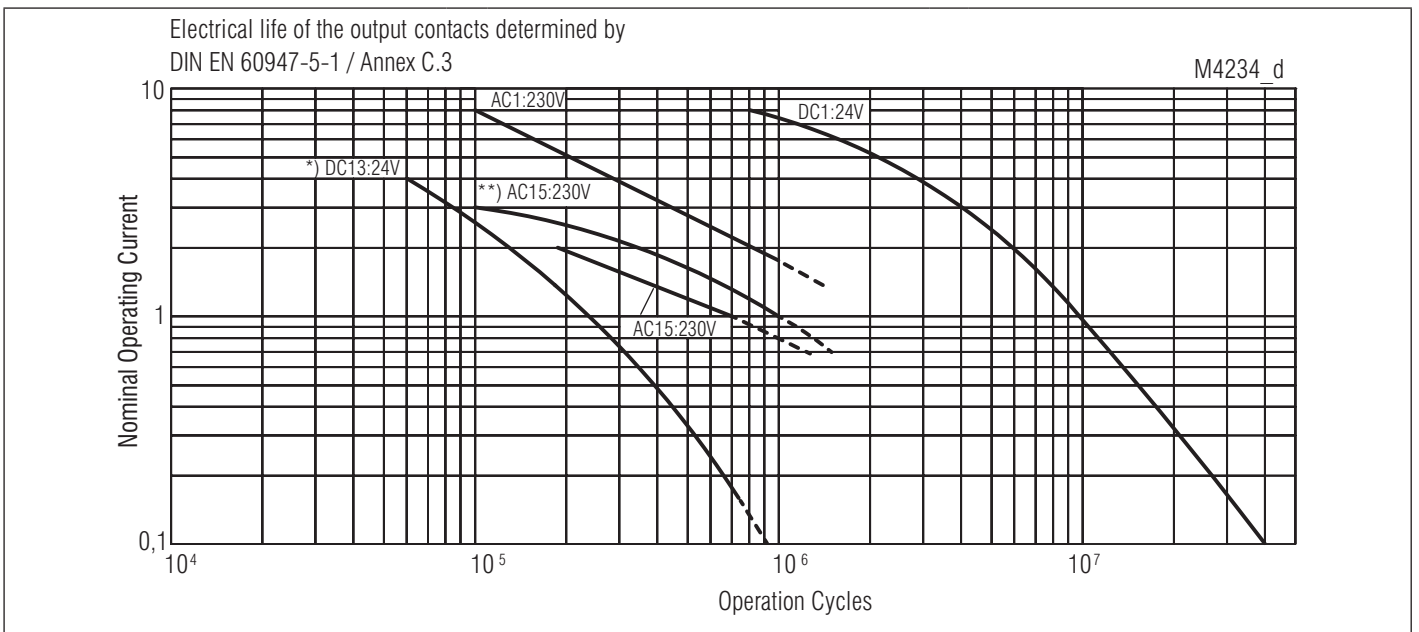


Electrical life for contact material AgNi
 *) ≤ 1 A with 1 Hz
 > 1 A ... 4 A with 0.1 Hz
 **) for AgSnO₂

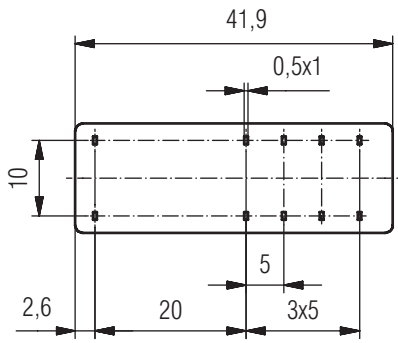


Drilling plan (solder side)


Pin arrangements OA 5611.52/...L1 2NO / 2NC

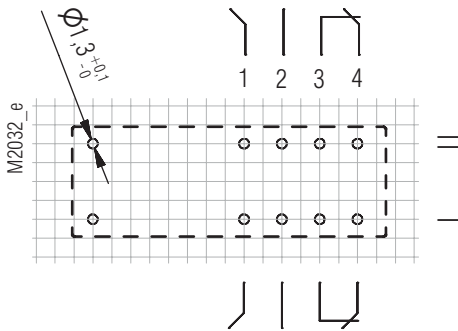


Pin arrangements OA 5611.52/...L4 2NO / 2NC

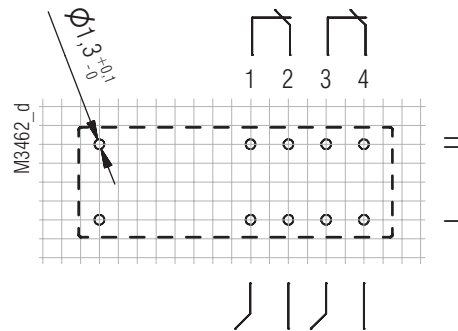


Pin arrangements OA 5611.52/...L5 2NO / 2NC

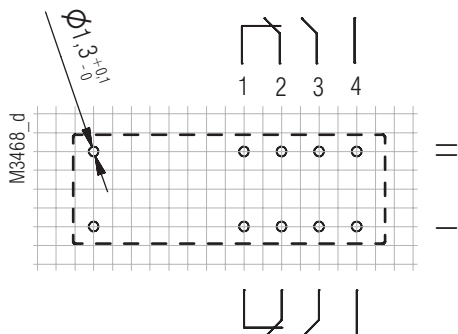


Pin arrangements OA 5611.48/...L1 3NO / 1NC

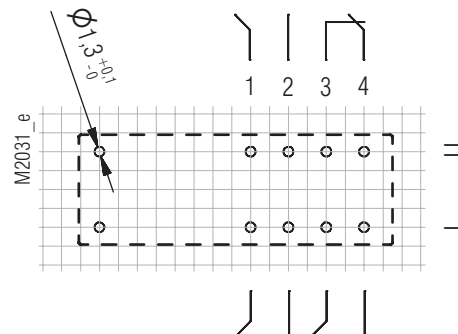



Pin arrangements OA 5611.48/...L4 3NO / 1NC

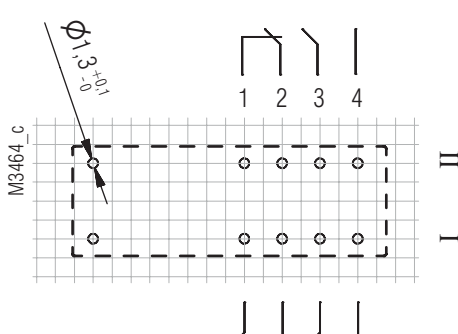

Pin arrangements OA 5611.28 1NO / 3NC

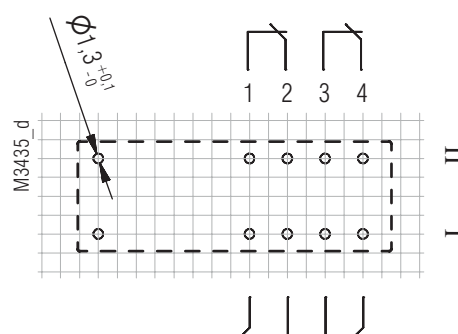


Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

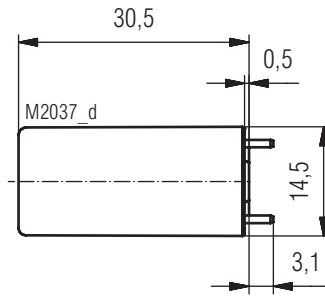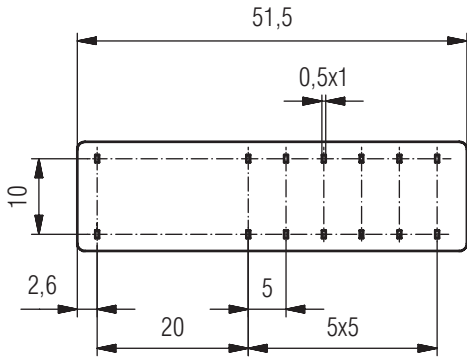


Drilling plan (solder side)

Pin arrangements OA 5612.60/...L4 5NO / 1NC

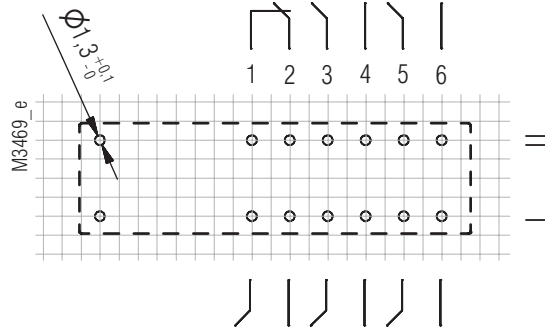


Drilling plan (solder side)


Pin arrangements OA 5612.60/...L1 5NO / 1NC

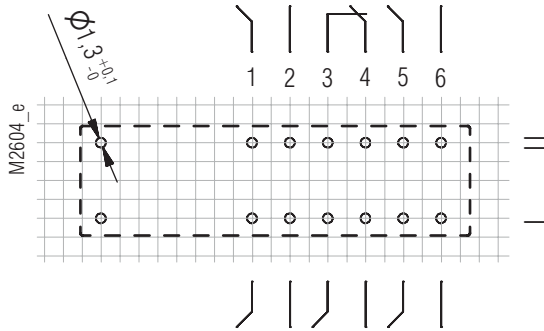


Pin arrangements OA 5612.54/...L4 4NO / 2NC

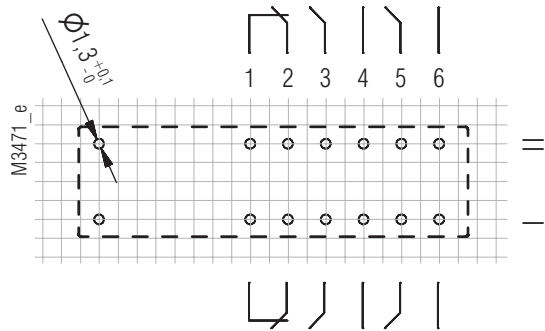


Pin arrangements OA 5612.54/...L1 4NO / 2NC

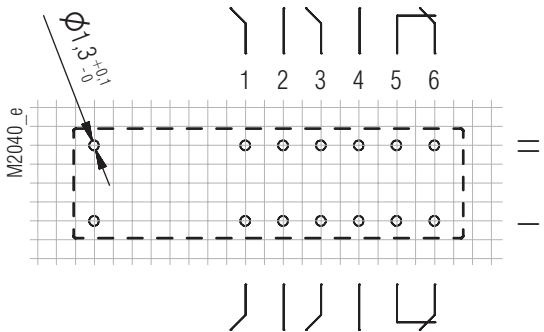


Pin arrangements OA 5612.50/...L4 2NO / 4NC

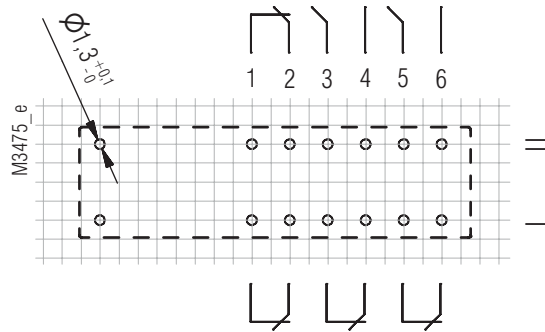

Pin arrangements OA 5612.50/...L1 2NO / 4NC

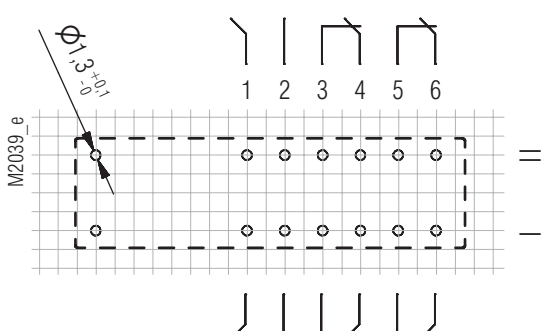


Pin arrangements OA 5612.18/...L1 3NO / 3NC

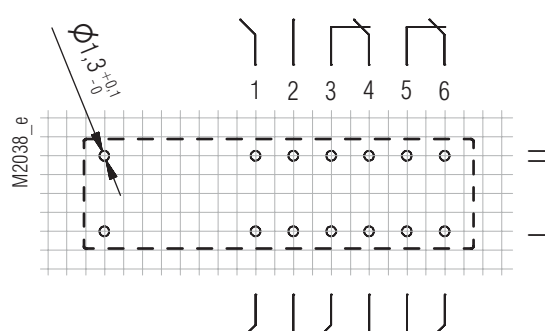

Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average


Relay socket ET 1415.031/61 for OA 5611

Article number: 0049512

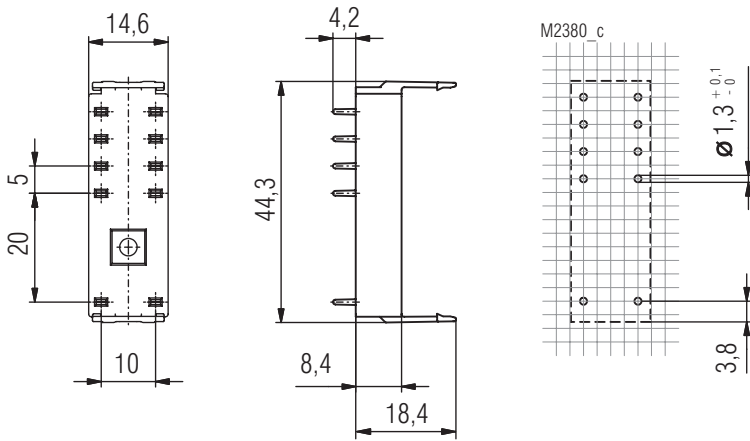

Relay socket ET 1415.032/61 for OA 5612

Article number: 0049513

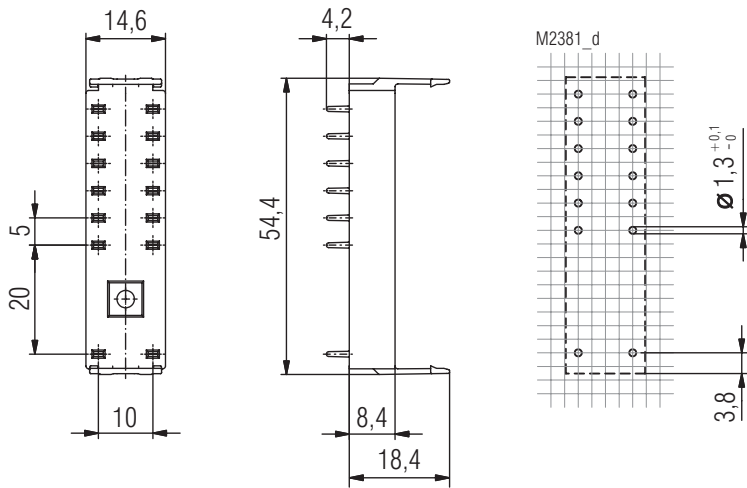

The grid consists of 25 columns and 30 rows. The first 10 columns are narrow, and the remaining 15 columns are wider. Each wide column contains a smaller grid of 10 columns and 5 rows defined by dotted lines, creating a total of 150 small sub-grids.

A vertical column of 30 horizontal lines, one for each row of the grid, intended for writing notes or solutions.

