

## CHARACTERISTICS

- **Compatible lubricants:**  
Up to NLGI2
- **Max. pressure:**  
73 psi (5 bar)
- **Capacity:**  
150 gr.
- **Re-filling outlet:**  
G 1/8 UNH-ISO 7/1

## MONO GR POINT LUBRICATOR: SIMPLE, ROBUST, RELIABLE

The revolutionary design of these lubricators is **the most ideal and economical system** for lubricating a wide variety of bearings, shafts motors, pumps, generators, boilers, conveyors, etc. Applications range from motor repair shops, steel mills, mines, quarries, ship yard, utilities, maintenance shops, agricultural machinery repair and more.

This **single point automatic grease lubricator** delivers constant grease volume to the working surface continuously. It's unique rechargeable design (possible with a standard grease gun), offers a **simple solution for re-filling**.

The adjustable output of grease provides the correct volume adjustment. It also provides a stable 0.28 bar (4 psi) minimum pressure with the bilateral spring design.



## TECHNICAL INFORMATION

	Grease	Oil
<b>Delivery</b>	continuous	continuous
<b>Max re-filling pressure</b>	5 bar	n/a
<b>Lubrication</b>	1/4 BSP F	1/4 BSP F
<b>Re-filling outlet</b>	G 1/8 UNH-ISO 7/1	screw cap
<b>Capacity</b>	150 gr.	150 ml.

## ORDERING INFORMATION:


Part. N. K000450 for grease

Part. N. K000451 for oil


## APPLICATIONS

- Agricultural
- Equipment
- Handling
- General mechanical devices
- Low-power
- Electric motors, etc.
- Heavy industry
- Textile machines

## DIMENSIONS (NOT IN SCALE)

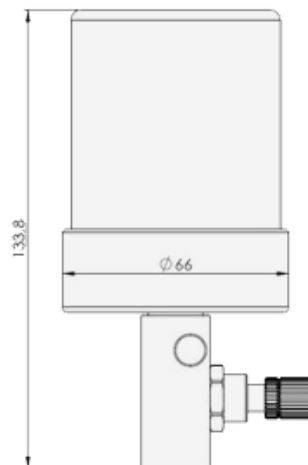

Grease version

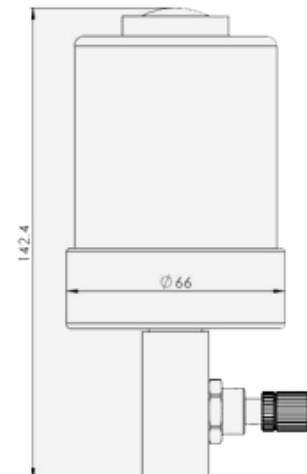

Oil version

## ACCESSORIES AND FITTINGS FOR THE MONO GR

### GENERAL FITTINGS



**0096135**  
UNION ¼BSP/F/P:  
¼BSP/F/P



**0102621**  
UNION ¼BSP/M/P:  
¼BSP/M/P



**0911007**  
BEND 90°  
¼BSP/F/P: BSP/M/T



**0914007**  
BEND 45°  
¼BSP/F/P: BSP/M/T

### ADAPTORS



**3077100**  
¼BSP/F/P: 1/8  
BSP/M/P



**910014**  
¼BSP/F/P: 3/8  
BSP/M/T



**K001001**  
¼BSP/F/P: ¼-28  
UNF/M/T



**K001002**  
¼BSP/F/P: M10



**K001003**  
¼BSP/F/P: M6



**K001004**  
¼BSP/F/P: M8

### RIGID EXTENSION TUBES



**K001005** 50 mm ¼BSP/M/T:¼BSP/M/T  
**K001006** 100 mm ¼BSP/M/T:¼BSP/M/T  
**K001007** 150 mm ¼BSP/M/T:¼BSP/M/T

### FLEXIBLE EXTENSION TUBING



**5717302**  
NYLON EXTENSION TUBING  
Flexible - for use only up to  
80°C - 8 mm od/6 mm id

### FLEXIBLE TUBING COUPLINGS



**3084675**  
¼BSP/M/T: 8 mm od



**K001010**  
¼BSP/F/P: 8 mm od



**3084574**  
90° bend  
¼BSP/F/P: 8 mm od

### BRUSH FITMENTS




**2049009**  
1/8BSP/F/P bristles  
35 mm long 17 mm Ø  
overall length 60 mm



**2037165**  
1/8BSP/F/P bristles  
30 mm long , 57 mm wide  
overall height 50 mm



**K001011**  
¼BSP/F/P bristles  
40 mm long 20 mm Ø  
overall length 70 mm

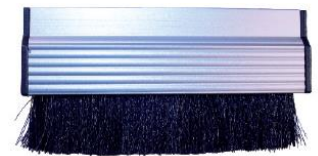

**K001012**  
¼BSP/F/P bristles 20 mm long  
Overall width 32 mm, length  
100mm, depth 48 mm