

# EPR3 Push Rod Melt Pressure Sensors

ENHANCED PUSH-ROD DESIGN  
MELT PRESSURE TRANSDUCER



## Description

Dynisco's model EPR3 high - temperature melt pressure transducer is offered as an alternative to its PT420 and PT460 series. The push - rod design is suitable for applications where the use of a filled system may not be desirable, such as the extrusion of food and medical products and the manufacture of photographic film. Model EPR3 is available in pressure ranges from 0 - 1,500 through 0 - 10,000 psi.


## Features

- Better than  $\pm 0.5\%$  accuracy
- Push - rod design
- Measures up to 750°F (400°C)
- All stainless steel, wetted parts
- Internal 80% shunt calibration


Performance Characteristics	
Ranges (psi):	0 - 1,500, 0 - 3,000, 0 - 5,000, 0 - 7,500, 0 - 10,000
Accuracy:	±0.5% FSO
Repeatability	±0.2% FSO
Mounting Torque:	100 inch - lbs. recommended, 250 inch - lbs. maximum
Maximum Pressure:	150% full scale
Material In Contact With Pressure Media:	17 - 4 PH stainless steel, Dymax® coated
Weight:	13.25 oz.
Electrical Characteristics	
Configuration:	Four active arm bonded Wheatstone bridge strain gage
Bridge Resistance:	Input: 345 Ohms minimum; Output: 350 Ohms ±10%
Excitation:	10 Vdc recommended, 12 Vdc maximum
Internal Shunt Calibration (R-Cal):	80% FSO ±1.0%
Insulation Resistance:	1,000 megohms at 50 VDC

Temperature Characteristics	
Transducer Diaphragm:	
Maximum Diaphragm Temperature:	750°F (400°C)
Zero Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Sensitivity Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Electronics Housing:	
Maximum Temperature:	250°F (121°C)
Zero Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Sensitivity Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)

### Ordering Guide for EPR3

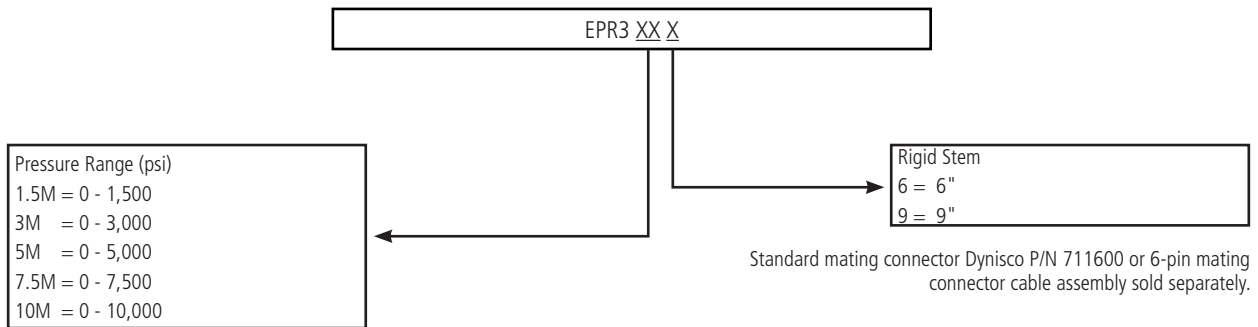

## Dimensions

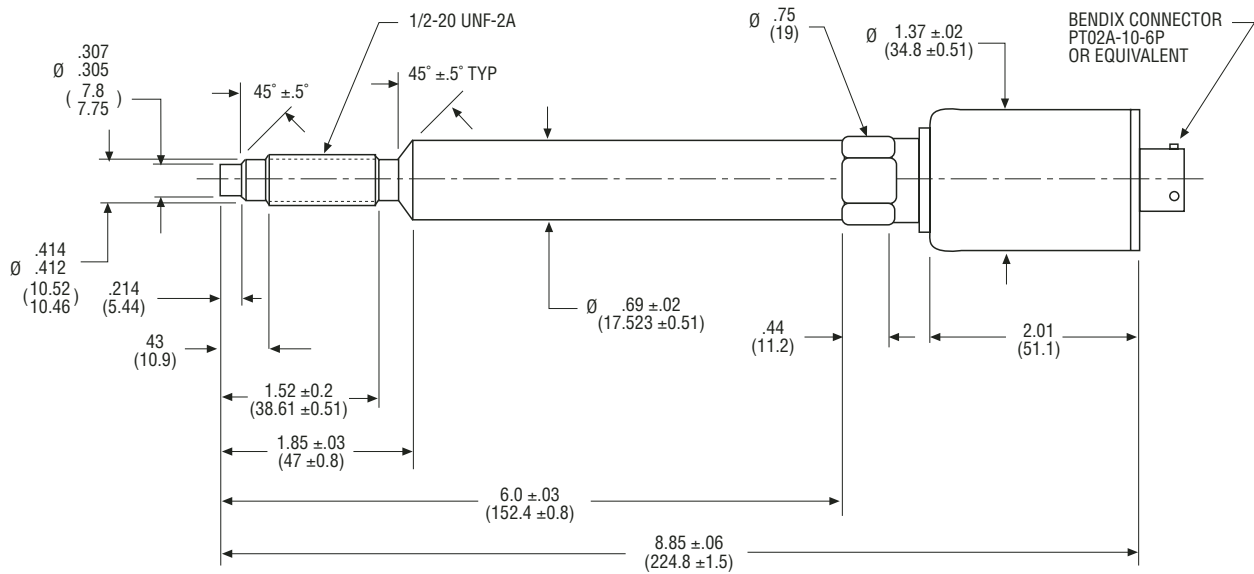

All dimensions are in inches (millimeters) unless otherwise specified

All dimensions are in inches (mm) unless otherwise specified.  
 ©2016. Dynisco reserves the right to make changes without notice.  
 Refer to [www.dynisco.com](http://www.dynisco.com) for access to Operator Manual and other support documentation.  
 DSEPR3  
 Rev: 1216



[www.dynisco.com](http://www.dynisco.com)

**Dynisco**  
 38 Forge Parkway  
 Franklin, MA 02038  
 USA

Hotline 1-800-Dynisco  
[www.dynisco.com](http://www.dynisco.com)  
 Phone +1 508 541 9400  
 Fax +1 508 541 6206  
 Email [infoinst@dynisco.com](mailto:infoinst@dynisco.com)

**Dynisco Europe, GmbH**

Pfaffemstr. 21 Phone +49 7131 297 0  
 74078 Hellbronn Fax +49 7131 297 166  
 Germany Email [dyniscoeurope@dynisco.com](mailto:dyniscoeurope@dynisco.com)

**Dynisco Shanghai**

Building 7A, No. 568 Phone +86 21 34074072-819  
 Longpan Rd Malu Toll Free +86 400 728 9117  
 Jiading, 201801 China Fax +86 21 34074025