

# Replacement Cords & Thermostats

## Heat Shield

HS1



Use when exhaust manifold or turbo come close to heater termination.

## TwinStat™ Thermocord

HOTSTART's TwinStat™ Thermocord is an energy efficient, idle reduction heater cord ideal for fleet operations. The cord's twin thermostats monitor engine temp and ambient temp, allowing for heating to happen only when needed. Contact HOTSTART customer service to select the best heater cord for your fleet.



**NOTE:** When ordering in-block heater **and** thermocord, place suffix **-WOC** (which stands for **without cord**) after the heater model number to save cost as the standard 6' (1.8m) heater cord is replaced by the Thermocord harness.

## For use with In-block Heaters

Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	1	IM6-1IN	IM6-2IN
11' 3.4m	1	IM11-1IN	IM11-2IN
16' 4.8m	1	IM16-1IN	IM16-2IN

Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	2	11PR72T	21PR72T
11' 3.4m	2	11PR132T	21PR132T
16' 4.8m	2	11PR192T	21PR192T

### STYLE 1




15amp, 120V




15amp, 240V

Fits most competitor's applications.

### STYLE 2



15amp, 120V



15amp, 240V




## Thermocord for In-block Heaters

Part No.	Volts	Max Amps	Thread Size	Temp Range
TC031308-866	120	15	1/2"	80°-100°F (27°-38°C)
TC031310-866	120	15	1/2"	100°-120°F (38°-49°C)
TC031312-866	120	15	1/2"	120°-140°F (49°-60°C)
TC032308-866	240	10	1/2"	80°-100°F (27°-38°C)
TC032310-866	240	10	1/2"	100°-120°F (38°-49°C)
TC032312-866	240	10	1/2"	120°-140°F (49°-60°C)

4'  
1.2m

3 ft.  
1m

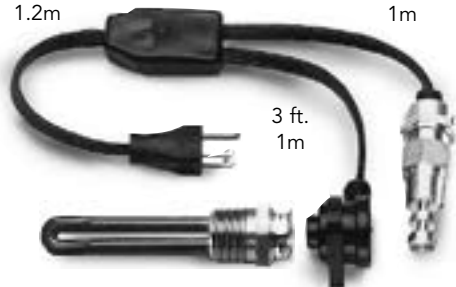


Heater shown for illustration purposes only



## Flush Mount Kits for In-block Heaters

Model Number 120 Volt	Model Number 240 Volt	Cord Length	Plug Style
IM6-1IN-FM	IM6-2IN-FM	6' (1.8.m)	2
IM11-1IN-FM	IM11-2IN-FM	11' (3.4m)	2
IM16-1IN-FM	IM16-2IN-FM	16' (4.8m)	2


Kits include:  
11PR- style  
cord (shown  
on page 48),  
recessed male  
receptacle and  
hinged flip  
cover.

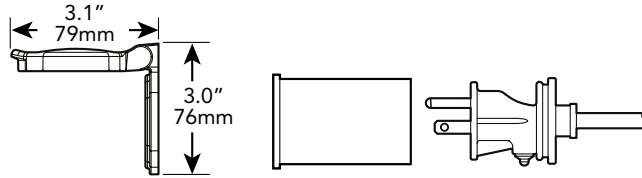

## Flush Mount Kits for Thermosiphon Engine Heaters

Model Number	Volts	Amps	For Heater with Wattage of:
FM15120	120	15	500 to 1800
FM15240	240	15	500 to 3000
FM20120	120	20	2000 to 2250


Kits include:  
Recessed male  
receptacle with 6'  
(1.8m) cord (no female  
connectors), hinged  
flip cover and female  
connector.

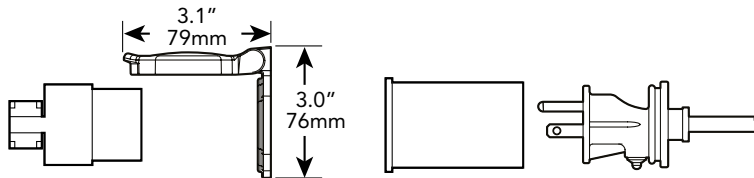

## Other Accessories


### Recessed Male Receptacle – with 6' (1.8m) cord (no female connectors)

Model Number	Volts	Amps
RM5-15	120	15
RM6-15	240	15
RM5-2Ø	120	20
RM6-2Ø	240	20

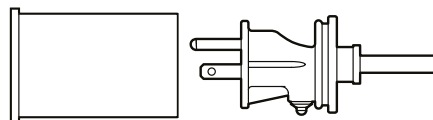

### Female Connector - for extension cords


Model Number	Volts	Amps
FM1G2ØA	120	15/20
FM2G2ØA	240	15/20

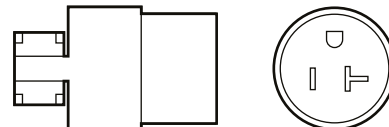

### Hinged Flip Cover

Model Number	Description
*FC-KH	Black/HOTSTART Logo
FC-KH-C	Chrome/HOTSTART Logo

\*Standard with kit

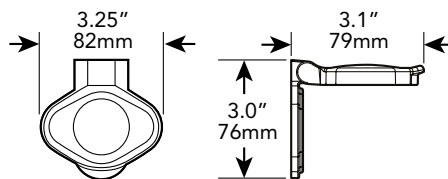

### Plug Housing

Model Number
A-2223-PH

