

# Supportring for Aluminum Seal

---

INFICON ISO-KF fittings are manufactured according to ISO 2861/1, DIN 28403 and Pneurop 6606. Our quality fittings are the standard components for all vacuum and high vacuum applications. The high quality INFICON components are designed and tested for leak rates less than  $1 \times 10^{-9}$  mbar l/s.



## BENEFITS

---

- Competitively priced
- World wide logistics
- Design and measures follow strictly international respected standards
- 2011/65/EU RoHS compliant

## ORDER INFORMATION


---

Type	DN 10-16 ISO-KF	DN 20-25 ISO-KF	DN 32-40 ISO-KF	DN 50 ISO-KF
Centering ring, inox, DN 10-16 KF, 32x7	211-171			
Centering ring, inox, DN 20-25 KF, 42x7		211-172		
Centering ring, inox, DN 32-40 KF, 57x7			211-173	
Centering ring, inox, DN 50 KF, 77x7				211-174

## SPECIFICATIONS

Type	DN 10-16 ISO-KF	DN 20-25 ISO-KF	DN 32-40 ISO-KF	DN 50 ISO-KF
Dimension A	32	42	57	77
Dimension B	7	7	7	7
Material:	Stainless steel: 301 / 1.4310	Stainless steel: 301 / 1.4310	Stainless steel: 301 / 1.4310	Stainless steel: 301 / 1.4310
For Aluminum Seal (optional)	211-167	211-168	211-169	211-170

## DIMENSIONS

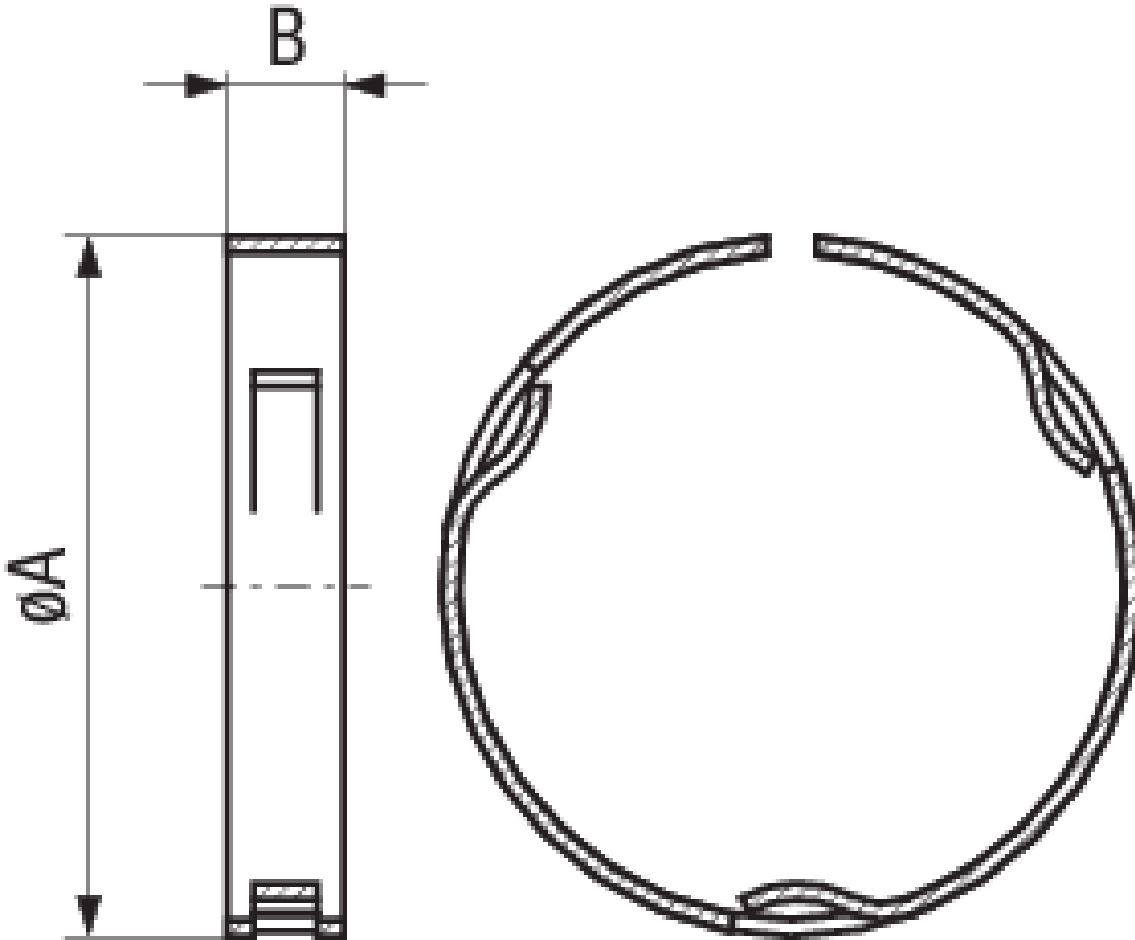

[www.inficon.com](http://www.inficon.com)    [reachus@inficon.com](mailto:reachus@inficon.com)

Due to our continuing program of product improvements, specifications are subject to change without notice. RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2016-08)    © 2016 INFICON